


OUTLINE DIMENSION

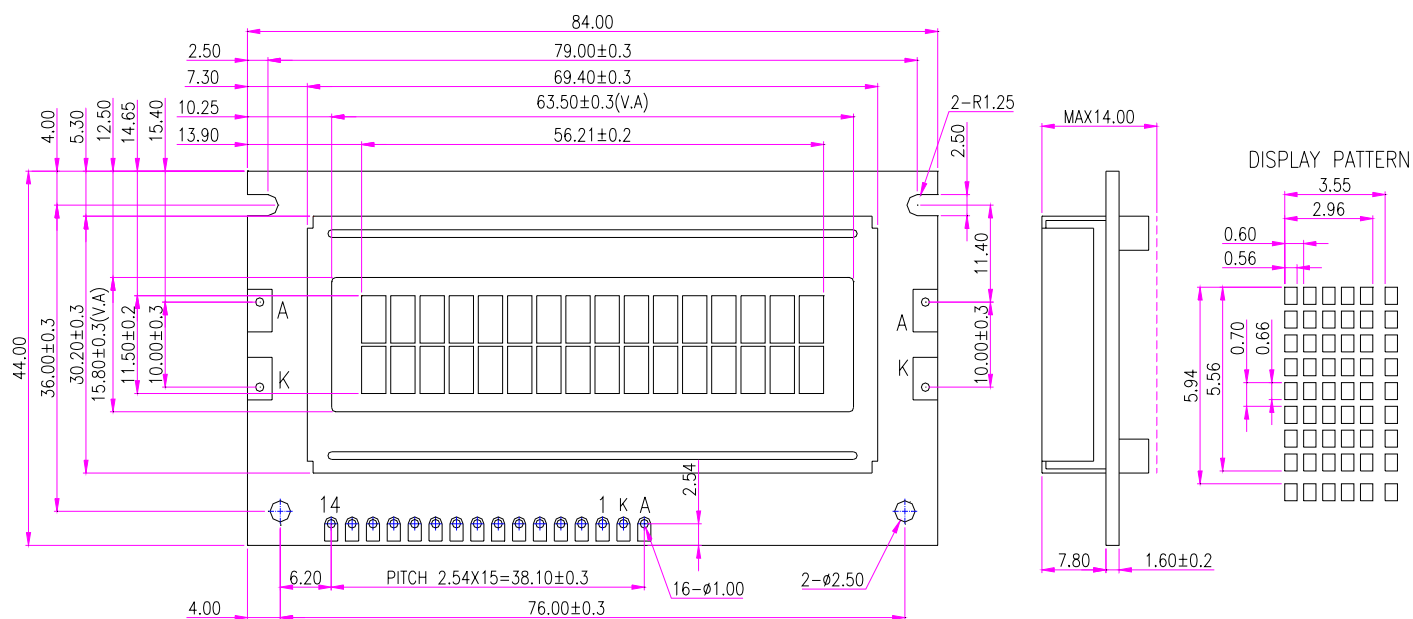

Unmarked Tolerance: $\pm 0.5\text{mm}$

Display Data Address

| Character | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Line 1 | 80 | 81 | 82 | 83 | 84 | 85 | 86 | 87 | 88 | 89 | 8A | 8B | 8C | 8D | 8E | 8F |
| Line 2 | C0 | C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | CA | CB | CC | CD | CE | CF |

NOTES:

1. DISPLAY TYPE: STN/Y-G MODE, TRANSFLECTIVE/POSITIVE.
2. DRIVE: KS0066U
3. VIEWING DIRECTION: 6 O’CLOCK.
4. PIN CONNECTION:

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | A | K |
|-----|-----|----|----|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|------|------|
| VSS | VDD | VO | RS | R/W | E | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | VLED | VLSS |

5. OPERATING TEMP: -20~70°C.
6. STORAGE TEMP: -30°C~80°C.
7. BACKLIGHT: Y/G BOTTOM LED .