
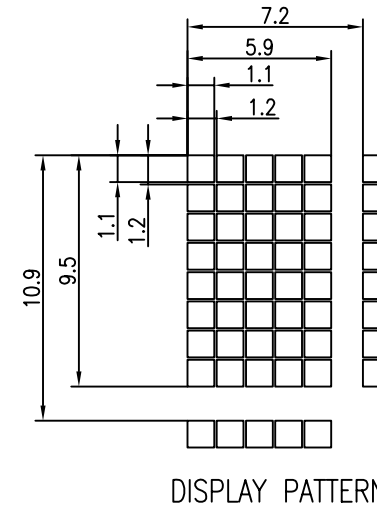


Pin Connections:

Pin NO.	Signal
1	VSS
2	VCC
3	VO
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LEDA
16	LEDK



NOTES:

1. DISPLAY TYPE :STN, TRANSFLECTIVE/POSITIVE.
2. DRIVE METHOD:1/16 DUTY,1/5BIAS,VDD=5V,VOP=4.2V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER:SPLC780 AND SPLC100 OR EQUIVALENT
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT:YELLOW-GREEN,VA-VK=5V
8. Unmarked Tolerance: ±0.5mm.

MULTI-INNO TECHNOLOGY CO., LTD

MI2002C