REV	DESCRIPTION	DATE
issue	first ver.	2007.01.26

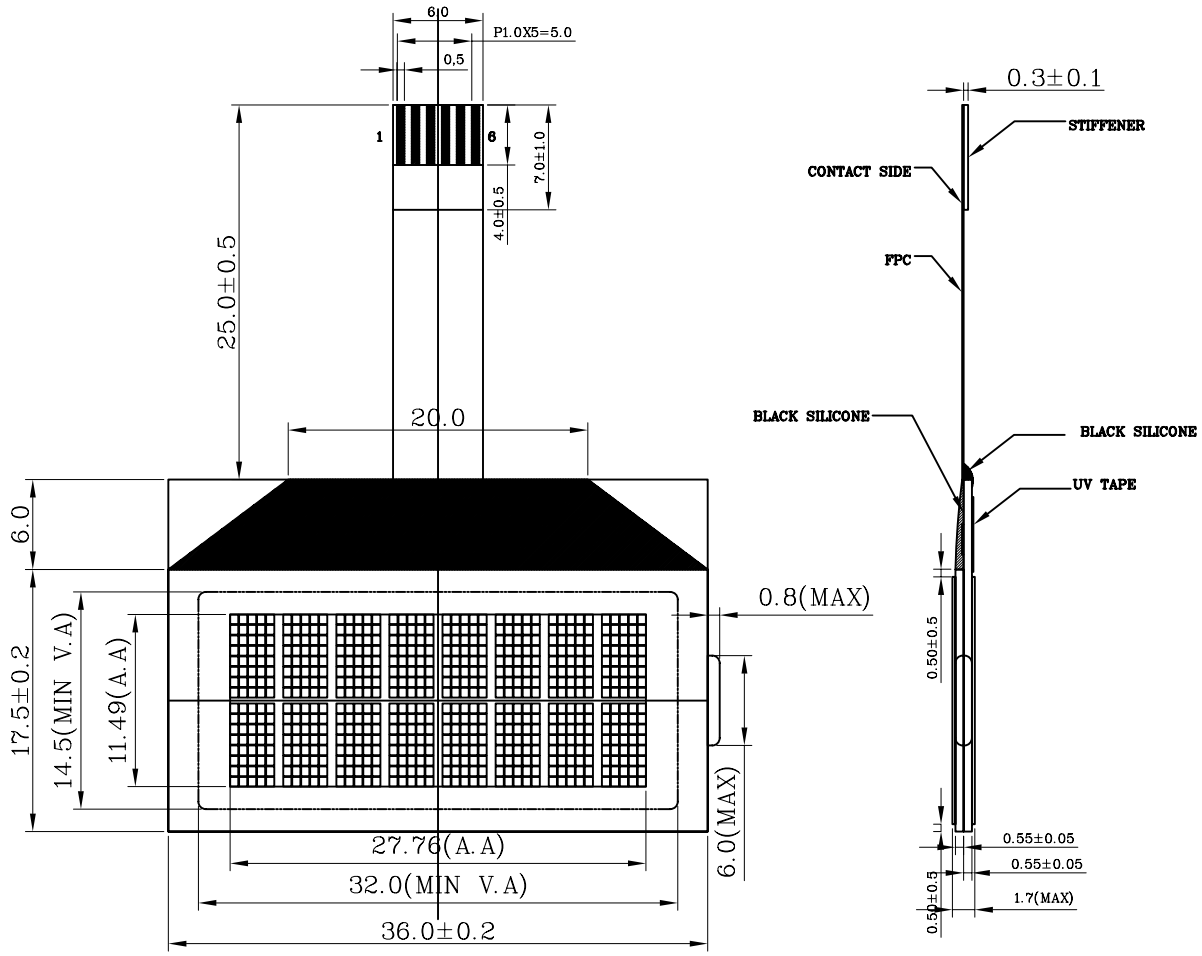

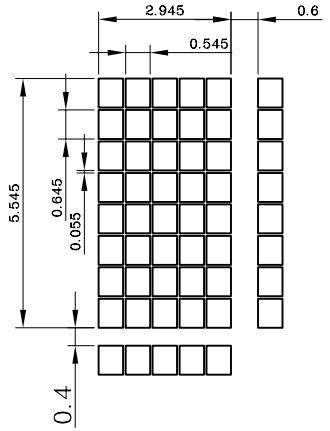

PIN	DESCRIPTION
1	SCL
2	POR
3	SDA
4	VDD
5	VSS
6	VLCD

NOTES:

1. DISPLAY TYPE: STN/GREY MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSMISSIIVE/POSITIVE
4. LCD CONTROLLER: PCF2119RU/2
5. DRIVE METHOD: 1/16 DUTY 1/4 BIAS
6. VDD: 3.0V
7. OPERATING VOLTAGE: 5.0V
8. BACKLIGHT: WITHOUT B/L
9. OPERATING TEMP.: -20℃~70℃
10. STORAGE TEMP.: -30℃~80℃
11. UNMARKED TOLERANCE: ±0.2
12. ▭ MEANS IMPORTANT DIMENSION
13. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: ROHS

MULTI-INNO Technology CO.,Ltd

2-501, Lv Hai Ming Du, Xue Fu Str. West, Nanshan Dist, Shenzhen, China

DRAWN BY:	TITLE: MI0802A-G		
CHECKED BY:			SCALE:
APPROVED BY:	DWG 2007.1.26		UNIT: mm
CONFIRMED BY:	DWG NAME: MI0802A-G LCM		SHEET NO: 1 OF 1