


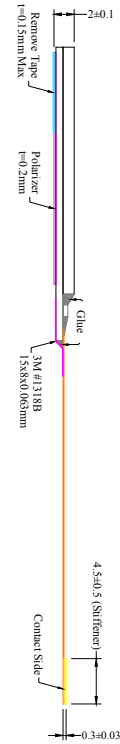


| Item | Date | Remark |
|------|----------|------------------|
| A | 20070920 | Original Drawing |

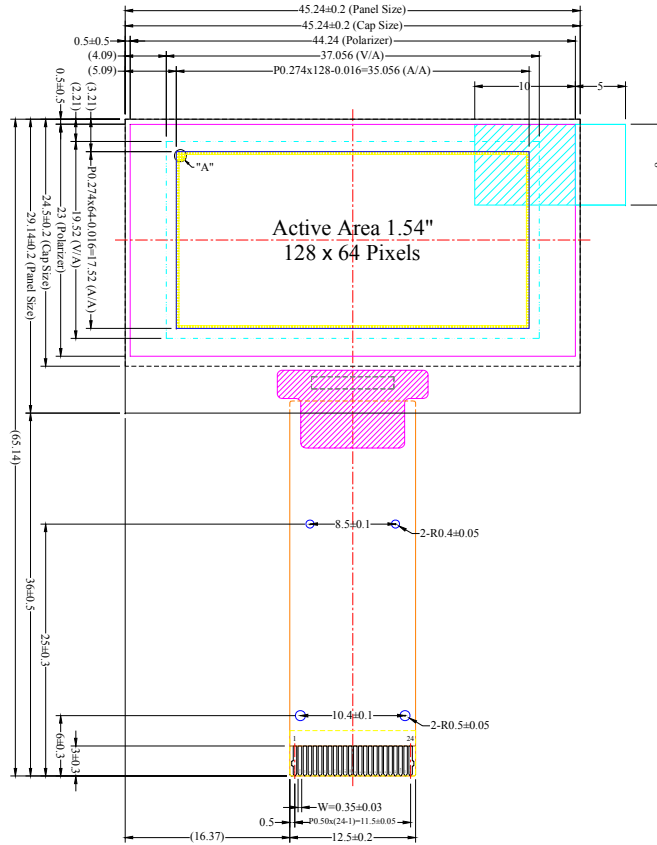

| Pin | Symbol |
|-----|------------|
| 1 | N.C. (GND) |
| 2 | VISS |
| 3 | VSS |
| 4 | N.C. |
| 5 | VDD |
| 6 | BS1 |
| 7 | BS2 |
| 8 | CS# |
| 9 | RES# |
| 10 | D/C# |
| 11 | R/W# |
| 12 | E/RD# |
| 13 | DP |
| 14 | D1 |
| 15 | D2 |
| 16 | D3 |
| 17 | D4 |
| 18 | D5 |
| 19 | D6 |
| 20 | D7 |
| 21 | BRF |
| 22 | VCOMH |
| 23 | VCC |
| 24 | N.C. (GND) |

- Notes:
- Color: Yellow
 - Driver IC: SSD1305
 - FPC Number: UT-0205-P05
 - Interface:
8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
 - General Tolerance: ±0.30
 - The total thickness (2.10 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 2.35 Max.

| | | | | | | |
|--------------------------------|--|-------|-----------------------|------------|----------------|----------|
| Customer Approval Signature | MULTI-INNO TECHNOLOGY CO.,LTD. | | | | Drawing Number | Rev. |
| | MI12864GO Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package | | | | | A |
| Unless Otherwise Specified | | | | Material | | |
| Unit | mm | Title | Soda Lime / Polyimide | | | |
| General Roughness | | Drawn | E.E. | Panel / E. | P.M. | |
| Tolerance | | By | | | | |
| Dimension | ±0.3 | Date | 20070920 | 20070920 | 20070920 | 20070920 |
| Angle | ±1 | | | | | |
| | | Scale | Sheet | Size | | |
| | | 1:1 | 1 of 1 | A3 | | |