


	A		B	
1	1	V _{L1}	26	B1
	2	GND	27	B0
	3	V _{L2}	28	ENAR
	4	GND	29	GND
2	5	V _{SHD}	30	HSYNC
	6	GND	31	GND
	7	GND	32	DCL _K
	8	GND	33	GND
3	9	V _{SYNC}	34	G5
	10	GND	35	G4
	11	RESET	36	G3
	12	GND	37	G2
4	13	GND	38	G1
	14	GND	39	G0
	15	CS	40	GND
	16	GND	41	R5
5	17	S _{DO}	42	R4
	18	S _{DI}	43	R3
	19	GND	44	R2
	20	S _{CL}	45	R1
6	21	GND	46	R0
	22	B5	47	GND
	23	B4	48	GND
	24	B3	49	GND
	25	B2	50	GND

REV	DC/EC NUMBER	DESCRIPTION	DATE

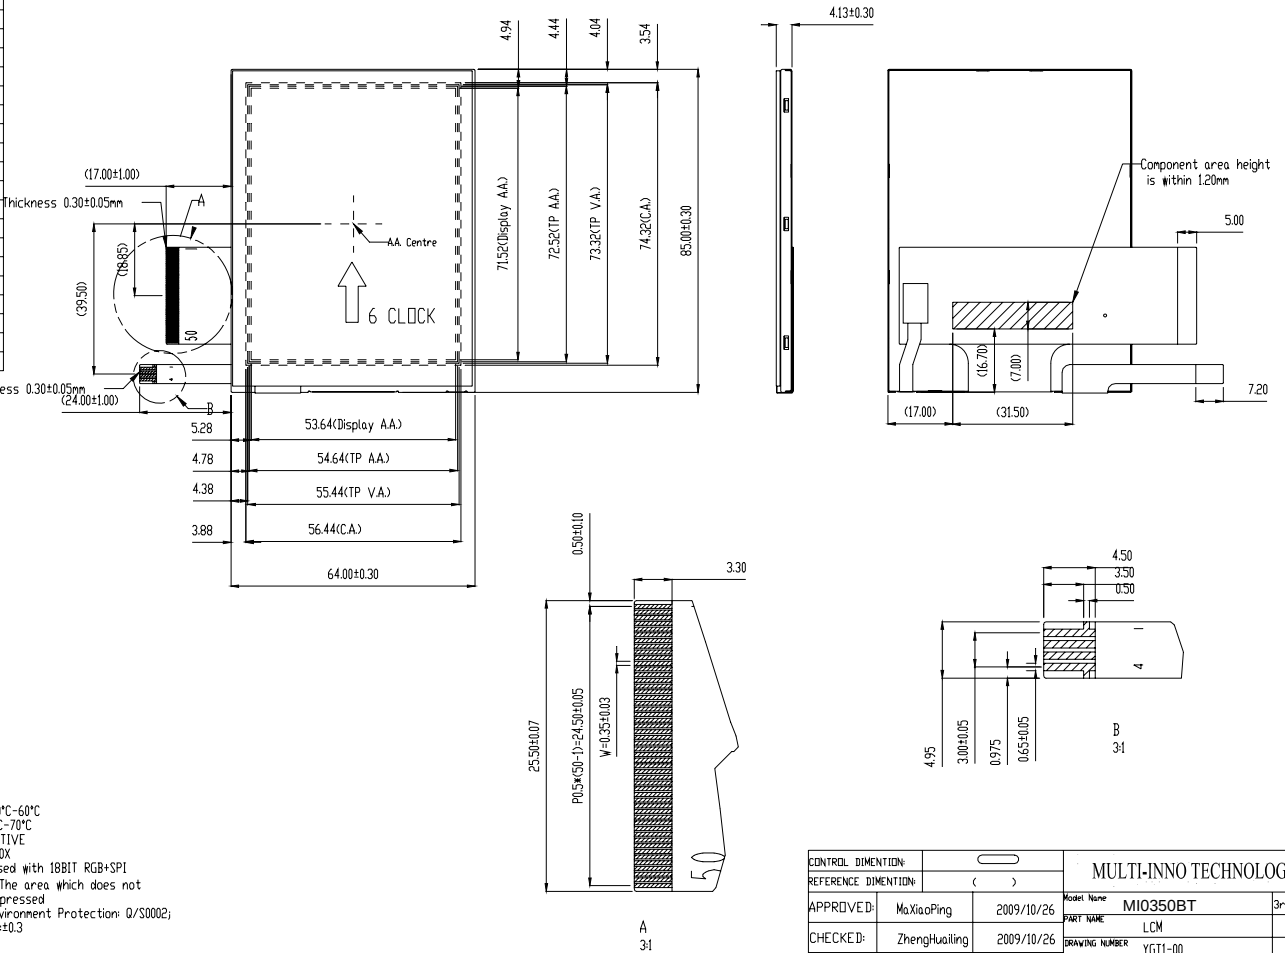

NOTE:

- 1.OPERATING TEMP:-20°C~60°C
- 2.STORAGE TEMP:-30°C~70°C
- 3.LCD-1FT TRANSFLECTIVE
- 4.LCD DRIVE:6DH04H0X
- 5.This Module can used with 18BIT RGB+SPI
- 6.Compressible area:the area which does not activate even it pressed
- 7.Requirement on Environment Protection: Q/S0002;
- 8.General tolerance:±0.3

CONTROL DIMENTION:				MULTI-INNO TECHNOLOGY CO.,LTD.	
REFERENCE DIMENTION:		()			
APPROVED:	MaXiaoPing	2009/10/26	Model Name	MIO350BT	3rd ANGLE 
CHECKED:	ZhengHualing	2009/10/26	PART NAME	LCM	SCALE mm
DESIGNED:	SuYueFeng	2009/10/26	DRAWING NAME	YGT1-00	UNIT
			MATERIAL NUMBER		PAGE 1/1