




MODULE NO.: MI12864JO

Rev : 0.2

Customer No. :

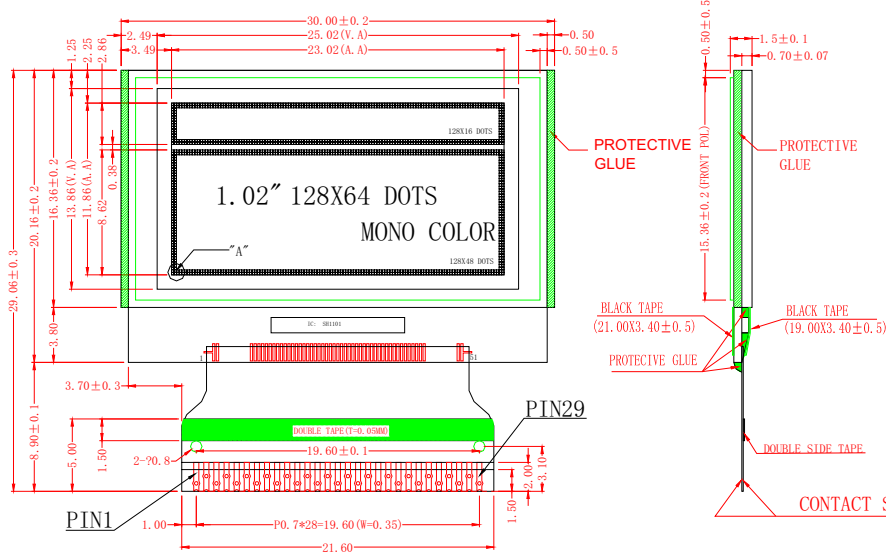

PIN DESCRIPTION

1	VSS	18	/RD
2	SW	19	D0
3	VDD2	20	D1
4	FB	21	D2
5	SENSE	22	D3
6	VBREF	23	D4
7	NC	24	D5
8	NC	25	D6
9	NC	26	D7
10	VDD1	27	IREF
11	C86	28	VCOMH
12	P/S	29	VPP
13	NC		
14	/CS		
15	/RES		
16	AO		
17	/WR		

detail:"A"/scale 10X

NOTES:

1. GENERAL TOLERANCE:  $\pm 0.2$
2. OPERATING TEMPERATURE:  $-20^{\circ}\text{C}$  TO  $70^{\circ}\text{C}$
3. STORAGE TEMPERATURE:  $-30^{\circ}\text{C}$  TO  $80^{\circ}\text{C}$
4. DRIVE IC : SH1101A
5. FPC:TOD9M0028FPC-A1-E
6. ROHS COMPLIANCY

CUSTOMER APPROVE		AMEND		NO.	NAME	QTY	Part No.	
Mechanical	Electrical				OLED		MULTI-INNO TECHNOLOGY CO.,LTD.	
		△	MODIFY TOTAL THICKNESS	20080711	1/64 DEPTH BIAS		PRODUCT NO.	REV
		△	加上ROHS COMPLIANCY标注	20071022	Vcp		MI12864JO	D
		△	去除 FPC 上 CLEAR TAPE/黑胶标注样式	20070918	VDD		DWN 杨学宇 20080711	BSN 杨学宇 20080711
		NO.	CONTENT	DATE	0'GLOCK		CHKD 谢志生 20080711	APPD 苏君海 20080711
							NOT IN SCALE	UNIT mm SHEET: 3/3