




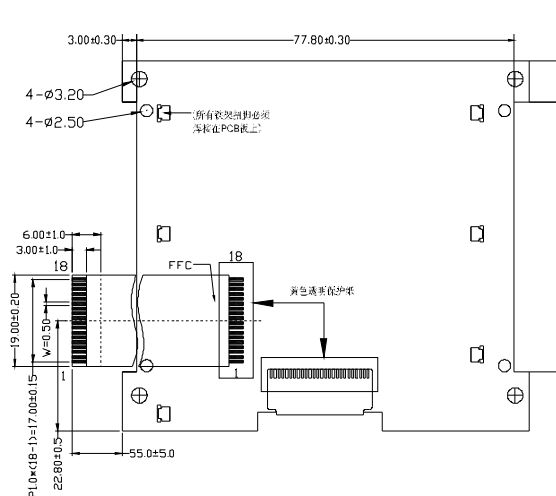


Customer No.:

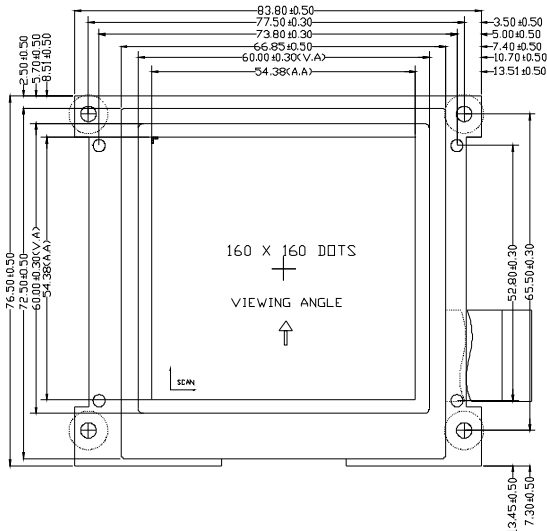


FFC ASSIGNMENT:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
VSS	AD	WR	RD	XCS	RESET	VDD	D0	D1	D2	D3	D4	D5	D6	D7	K	NC	A

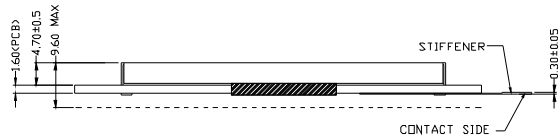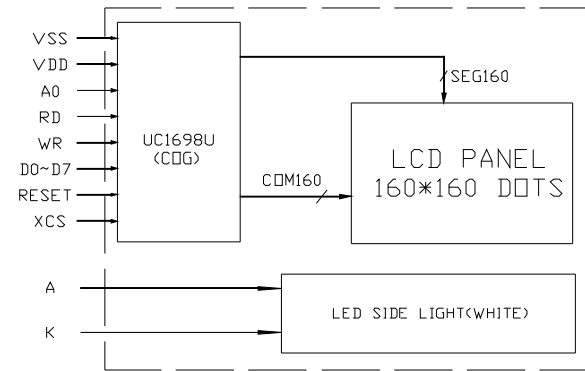

NOTES:

1. OPERATING TEMPERATURE: -20°C TO 70°C  
STORAGE TEMPERATURE: -30°C TO 80°C
2. LCD MODEL:FSTN/POSITIVE/TRANSFLECTIVE
3. 1/160 DUTY,1/10 BAIS,VLCD=16.5V,VDD=3.3V
4. VIEWING ANGLE: 6:00 O'CLOCK
5. BACKLIGHT:WHITE LED,VF=4.70±0.50V IF=50~70mA
6. RoHS COMPLIANT



CUSTOMER APPROVE		AMEND		液晶显示模块	MULTI-INNO TECHNOLOGY CO.,LTD.		
Mechanical	Electrical	△			PRODUCT NO. MI160160B-G	DRAW NO. LCM0417	REV A
		△			DWN 黄海鹏 20070903	DSN 黄海鹏 20070903	
		△			CHKD 伊少桢 20070903	APPD 陈向阳 20070903	
		△					
		NO.	CONTENT	DATE			