




Customer No.:

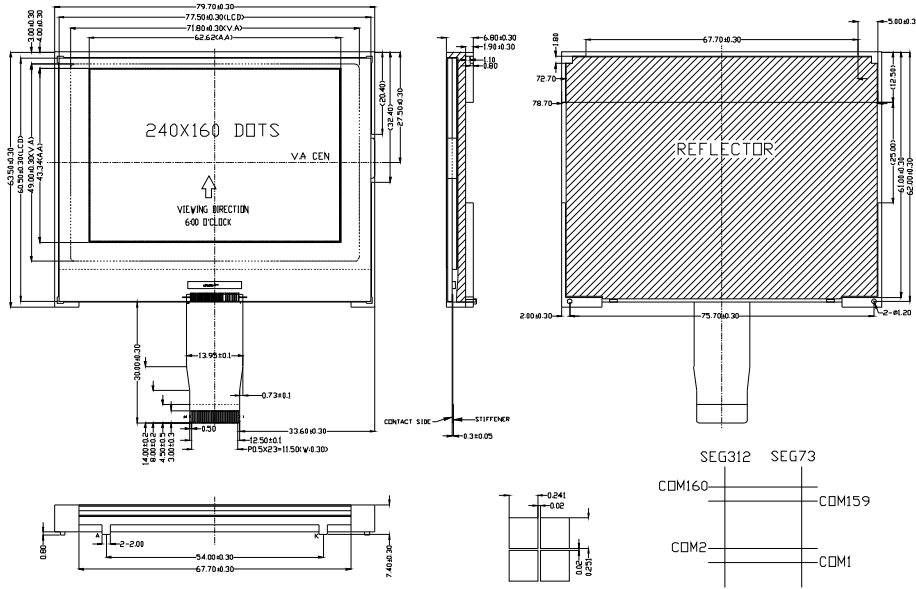

PIN	SYMBOL
1	VLCD
2	VS+
3	VS-
4	VB0-
5	VB1-
6	VB1+
7	VB0+
8	VDD
9	VSS
10	NC(TS14)
11	BM0
12	CS0
13	CD
14	WR1
15	WR0
16	RST
17	D0
18	D1
19	D2
20	D3
21	D4
22	D5
23	D6
24	D7

NOTES:

- 1.DISPLAY TYPE:FSTN/POSITIVE/TRANSFLECTIVE/6:00
2. OPERATING TEMP: 0°C~50°C
STORAGE TEMP: -20°C~70°C
3. DRIVER IC:UC1698U
4. DUTY=1/160;BIAS=1/12;VDD=3V;Vlcd=16.5V
5. BACKLIGHT:SIDE LED/WHITE,Vf=3.5~3.9V,(If=70mA)
6. ESD TEST:AIR DISCHARGE ON THE LCD'S SURFACE AT ±8KV

CUSTOMER APPROVE		AMEND		S-液晶顯示模組	MULTI-INNO TECHNOLOGY CO.,LTD.		
Mechanical	Electrical	△			PRODUCT NO. MI240160D-G	DRAW NO. LCM0416	REV A
		△			DWN 20070903	DSN 20070903	
		△			CHKD 20070903	APPD 20070903	
		ND	CONTENT	DATE			