


CON1

1	2	3	4
LEDA	NC	NC	LEDK

FFC

1	2	3	4	5	6	7	8
XD0	XD1	XD2	XD3	DISP OFF	YD	WF	LP
9	10	11	12	13	14		
XSCL	VDD	GND	NC	VADJ	NC		

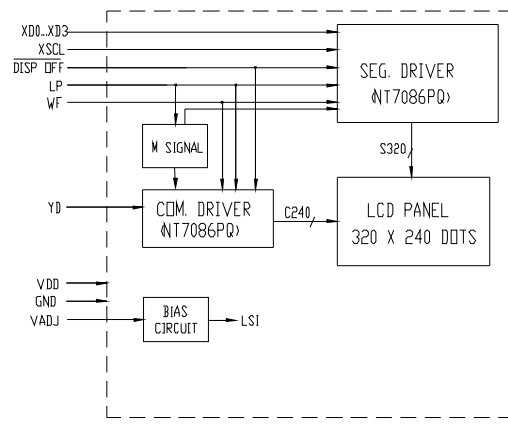

NOTES:

1. DISPLAY TYPE: STN/NEGATIVE/BLUE/TRANSMISSIVE
2. OPERATING TEMP: -20°C~70°C
STORAGE TEMP: -30°C~80°C
3. 1/240 DUTY, 1/17 BIAS, V_{LC}D=24V, V_{DD}=5V
4. BACKLIGHT: WHITE LED, I_F=95~115mA V_F=5V
5. RoHS COMPLIANT