


I/O PORTS:

| NO. | SYMBOL |
|-----|--------|
| 1 | VLCD |
| 2 | V2 |
| 3 | V3 |
| 4 | V4 |
| 5 | V5 |
| 6 | VSS |
| 7 | GND |
| 8 | VDD |
| 9 | FRM |
| 10 | CP |
| 11 | DF |
| 12 | LOAD |
| 13 | D.OFF |
| 14 | GND |
| 15 | D3 |
| 16 | D2 |
| 17 | D1 |
| 18 | D0 |



- NOTES:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 9:00
 3. POLARIZER MODE: TRANSLLECTIVE/POSITIVE
 4. DRIVE METHOD: 1/240 DUTY 1/16 BIAS
 5. LCD OPERATING VOLTAGE: 22.5V VDD=3.0-5.0V
 6. OPERATING TEMP.: -20°C+70°C
 7. STORAGE TEMP.: -30°C+80°C
 8. CONNECTOR: FPC
 9. DRIVER: NT7701 & NT7709
 10. UNMARKED TOLERANCES: ±0.3mm
 11. THE CONTROLLED DIMENSION MASK TO BE:
 12. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

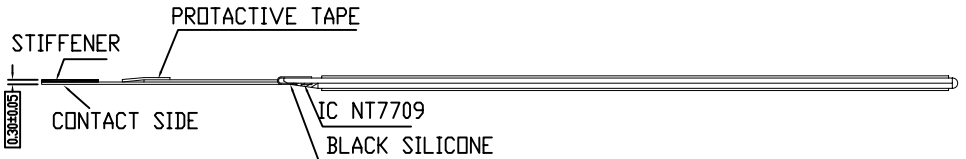