


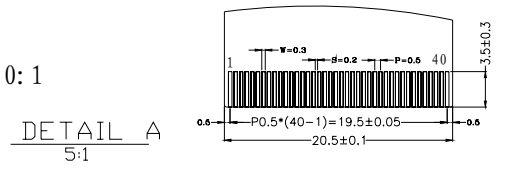

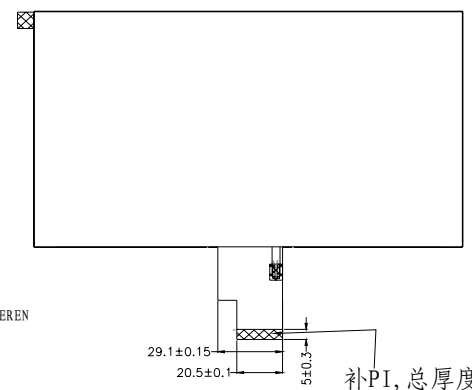


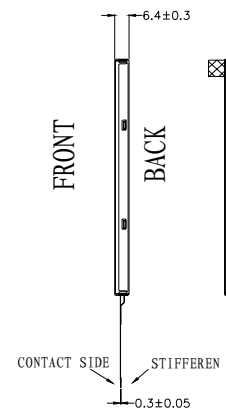

PINS ASSIGNMENTS

NO.	SYMBOL	NO.	SYMBOL
1	VCOM	32	LED-
2	VDD	33	L/R
3	VDD	34	U/D
4	NC	35	VGL
5	Reset	36	CABCEN1
6	STBYB	37	CABCEN0
7	GND	38	VGH
8	RXIN0-	39	LED+
9	RXIN0+	40	LED+
10	GND		
11	RXIN1-		
12	RXIN1+		
13	GND		
14	RXIN2-		
15	RXIN2+		
16	GND		
17	RXCLKIN-		
18	RXCLKIN+		
19	GND		
20	RXIN3-		
21	RXIN3+		
22	GND		
23	NC		
24	NC		
25	GND		
26	NC		
27	IMD		
28	SELB		
29	AVDD		
30	GND		
31	LED-		

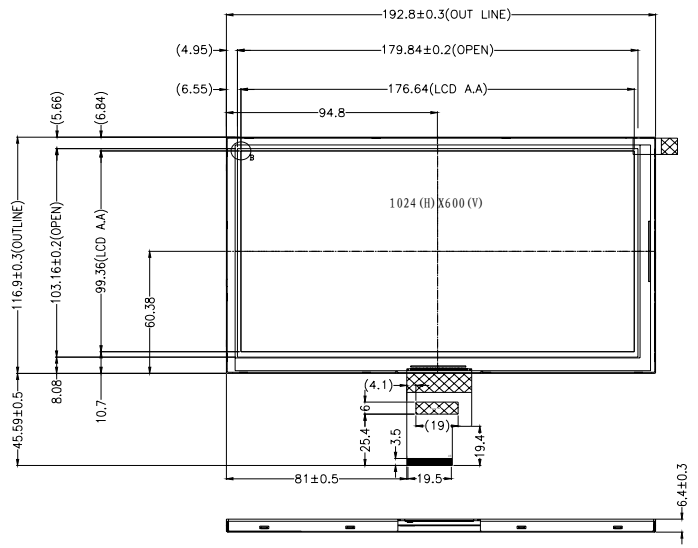

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
2. OPERATING VOLTAGE: DVDD=3.3V
3. VIEWING DIRECTION: 12 O'CLOCK.
4. IC DRIVER: HX8696+HX8282
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: 36-WHITE LED, If=240mA, Vf=9.9V.
8. GENERAL TOLERANCE: ±0.2.
9. RoHS COMPLIANT.

CUSTOMER APVL		DATE	
DRAWN		SCALE	TITLE
DFTG CHK		UNIT	MI0800RT-3
ENGR CHK		mm	MODEL
APPROVAL			DWG NO
MULTI-INNO TECHNOLOGY CO.,LTD.			PAGE 1/1