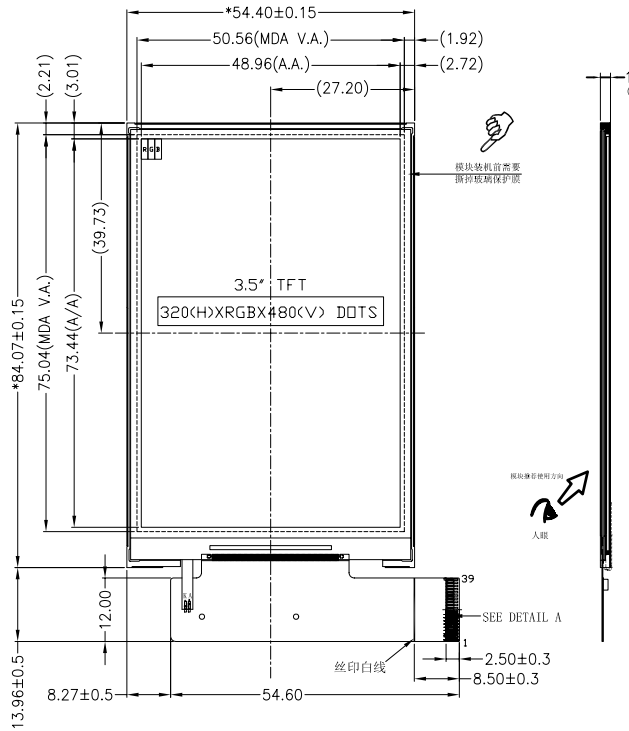

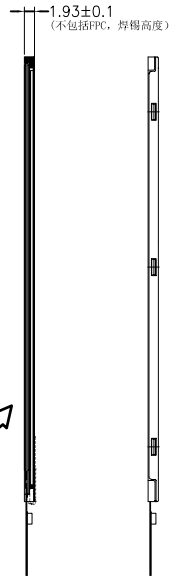

FPC展开出货

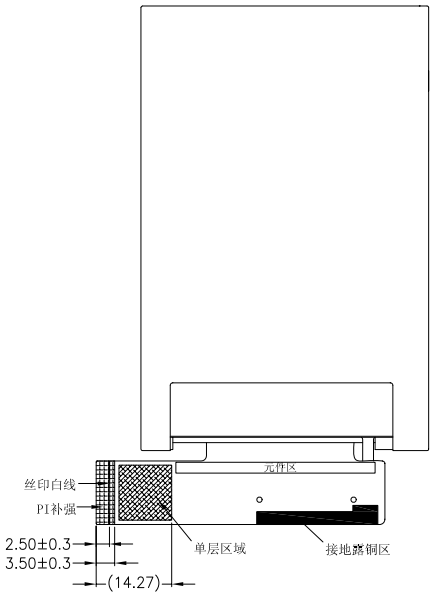

FPC弯折参考图

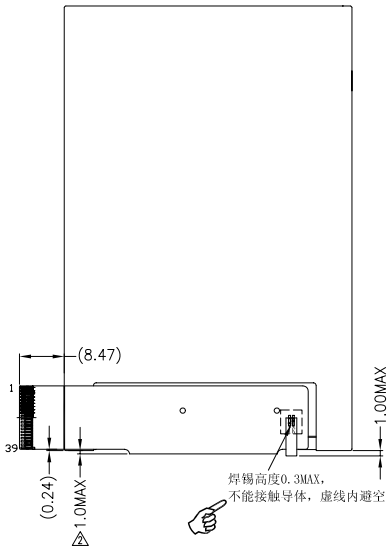

No:	PIN NAME
1	GND
2	RESET
3	CS
4	SCL
5	SDI
6	SDO
7	DB00
8	DB01
9	DB02
10	DB03
11	DB04
12	DB05
13	DB06
14	DB07
15	DB08
16	DB09
17	DB10
18	DB11
19	DB12
20	DB13
21	DB14
22	DB15
23	DB16
24	DB17
25	DB18
26	DB19
27	DB20
28	DB21
29	DB22
30	DB23
31	VSYNC
32	HSYNC
33	DOTCLK
34	ENABLE
35	IOVCC
36	VCC
37	GND
38	LEDA
39	LEDK



DETAIL A
MATH WITH:
FH26-39S-0.3SHW



DOTS DETAILS
SCALE 50:1



BL CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT-LCD,TRANSMISSIVE.
2. OPERATING VOLTAGE: VCC=2.8V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: HX8357-D.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: 6-CHIP WHITE LED, If=20mA,Vf=19V.
8. SURFACE LUMINANCE: 320cd/m^2(TYP.).
9. TREATMENT OF TOP SURFACE : ANTI-GLARE.
10. GENERAL TOLERANCE: ±0.2.
11. RoHS COMPLIANT.

VER.	REVISED DESCRIPTION	DATE
02	Revise bending area dimension	2015.10.10
01	First issue	2015.05.28

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL 2015.10.10	SCALE : 1/1	MODULE P/N: MI0347CT-2
CHECKED BY:		UNIT: mm	
APPROVED BY:			DESCRIPTION: TFT MODULE
VERSION NO:	02		