




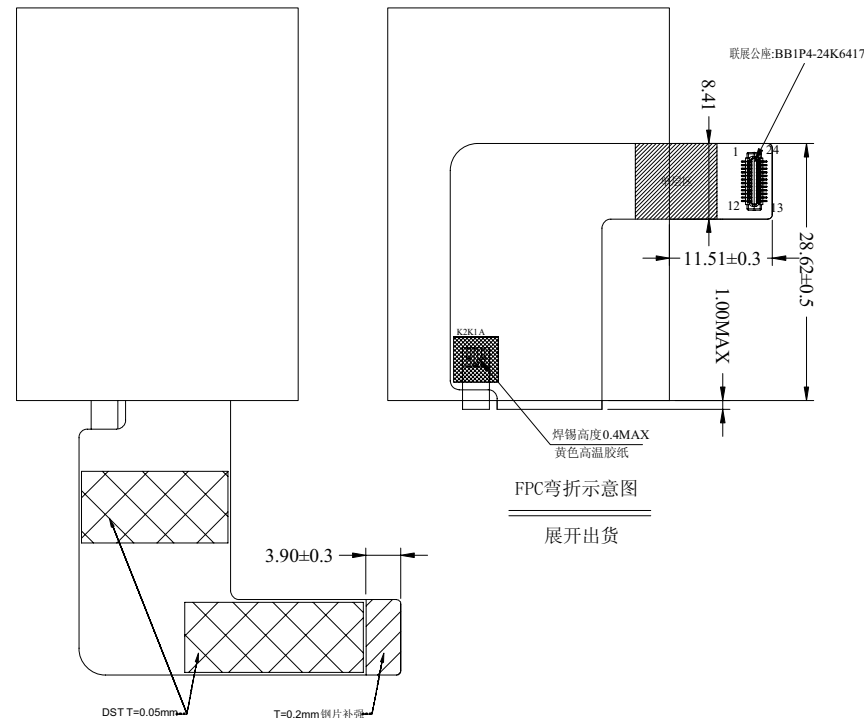


PIN ASSIGNMENTS

PIN	SYMBOL
1	GND
2	DP0
3	DP1
4	DP2
5	DP3
6	DP4
7	DP5
8	DP6
9	DP7
10	GND
11	VIO2.8_PMU
12	VIO1.8_PMU
13	LPTE
14	LRSTB
15	LPAO
16	LPCEOB
17	LPRDB
18	LPWRB
19	GND
20	VBAT
21	LEDK1
22	LEDK2
23	GND
24	GND

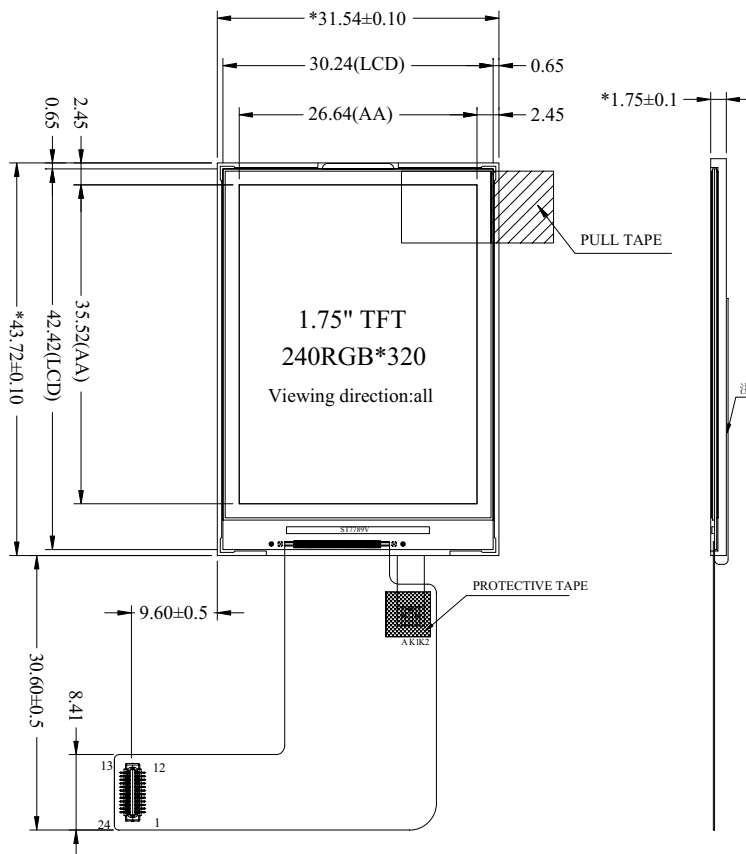

Pixel scale:100:1



NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK.
2. OPERATING VOLTAGE: VCC=2.8V.
3. VIEWING DIRECTION: FULL VIEWING ANGLE.
4. IC DRIVER: ST7789V.
5. OPERATING TEMP: -10°C ~ 60°C.
6. STORAGE TEMP: -20°C ~ 70°C.
7. LED BACKLIGHT: 2-CHIP WHITE LED, If=40mA, Vf=3.2V.
8. SURFACE LUMINANCE: 250cd/m<sup>2</sup>(TYP).
9. CONNECTOR TYPE: BB1P4-24K6417.
10. TOP POLARIZER SURFACE TREATMENT: TBD.
11. GENERAL TOLERANCE: ±0.2.
12. RoHS COMPLIANT.

MULTI-INNO TECHNOLOGY CO.,LTD.			
DRAWN BY:	CAROL 2015.06.25	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT: mm	MI0175AT-1
APPROVED BY:			DESCRIPTION:
VERSION NO:	01		TFT MODULE

01	FIRST ISSUE	2015.06.25
VER.	REVISED DESCRIPTION	DATE