
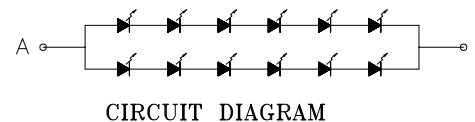



PIN	SYMBOL	PIN FUNCTION
1	VLED-	VLED-
2	VLED+	VLED+
3	GND	GND
4	VDD	VDD
5	R0	R0
6	R1	R1
7	R2	R2
8	R3	R3
9	R4	R4
10	R5	R5
11	R6	R6
12	R7	R7
13	G0	G0
14	G1	G1
15	G2	G2
16	G3	G3
17	G4	G4
18	G5	G5
19	G6	G6
20	G7	G7
21	B0	B0
22	B1	B1
23	B2	B2
24	B3	B3
25	B4	B4
26	B5	B5
27	B6	B6
28	B7	B7
29	GND	GND
30	CLKIN	CLKIN
31	STBYB	STBYB
32	HSD	HSD
33	VSD	VSD
34	DEN	DEN
35	NC	NC
36	GND	GND
37	XR(NC)	XR(NC)
38	YD(NC)	YD(NC)
39	XL(NC)	XL(NC)
40	YU(NC)	YU(NC)



NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATION VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: 12 O'CLOCK.
4. IC DRIVER: HX8664B+HX8264D
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: 12-LED WHITE.
8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
9. GENERAL TOLERANCE: ±0.2.
10. RoHS COMPLIANT.

VER.	REVISED DESCRIPTION	DATE
04	Add marked dimensions	2015.10.05
03	Delete internal structure lines of backlight on the front viewing, no change at TFT design and TFT product at all.	2015.08.05
02	Correcet the marked dimensions	2015.02.02
01	First issue	2013.12.03



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	VICTOR 20151005	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT:	MI0500PT-7
APPROVED BY:		mm	DESCRIPTION:
VERSION NO:	04		TFT MODULE