
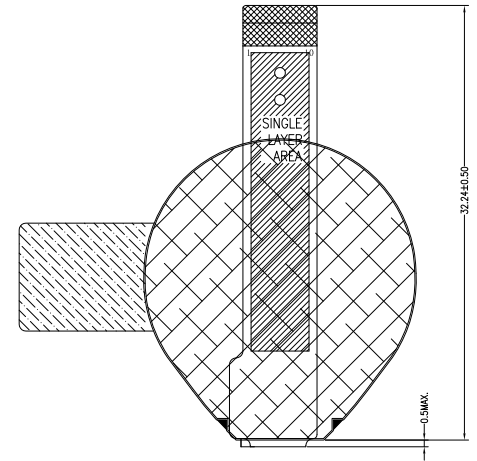

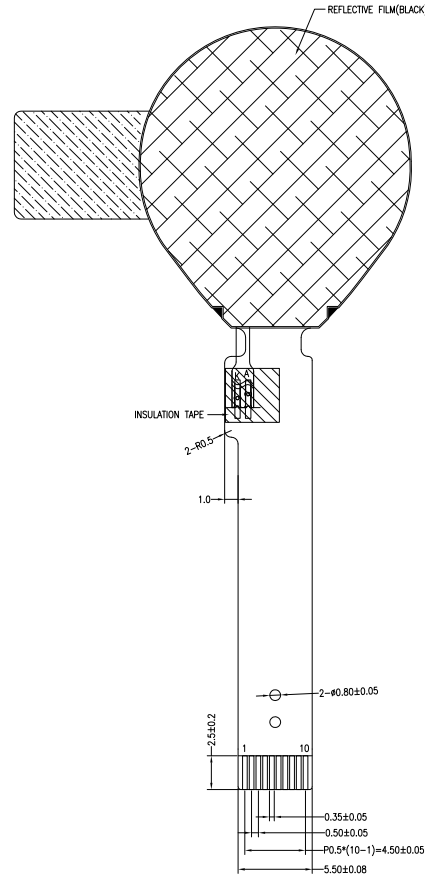
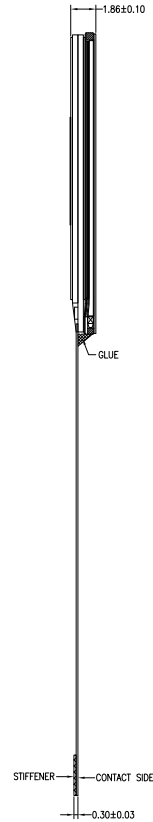


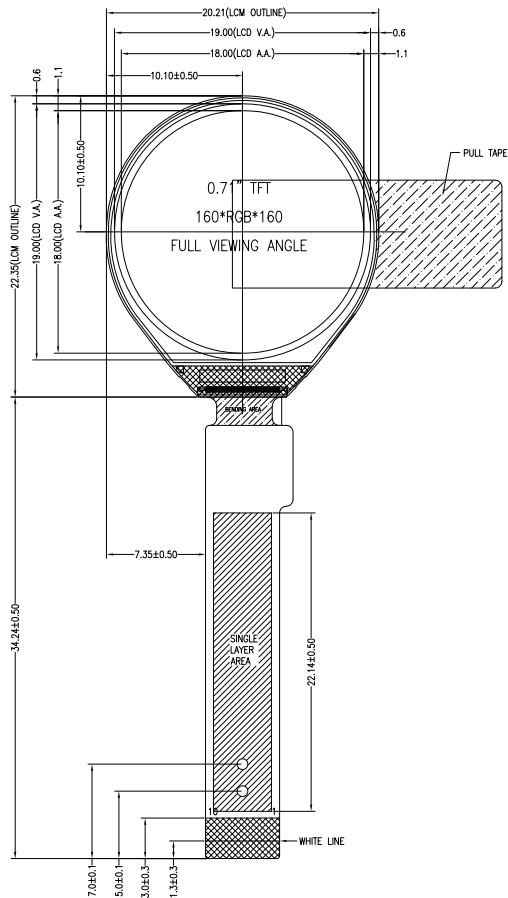


BENDING DIAGRAM FOR REFERENCE

PIN DESCRIPTION	
PIN	SYMBOL
1	IOVCC
2	VCC
3	SCLK
4	TE
5	RESET
6	CS
7	SDA
8	D/C
9	GND
10	LED A

* LEDK AND GND CONNECTED TOGETHER

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=2.8V, IOVCC=1.8V/2.8V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: GC9D01N
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, IF=20mA, VF=2.9V~3.1V
8. SURFACE LUMINANCE: 300CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. UNMARKED TOLERANCE: ±0.2MM
12. ROHS COMPLIANT



BACKLIGHT CIRCUIT DIAGRAM

		MULTI-INNO TECHNOLOGY CO., LTD.	
DRAWN BY:	CAROL	2024.08.05	MODULE P/N:
CHECKED BY:			MI0071AT-1
APPROVED BY:			UNIT: mm
VERSION NO:	01		SHEET NO.: 1/1

01	FIRST ISSUE	CAROL	2024.08.05
VER.	REVISED DESCRIPTION	REVISER	DATE