
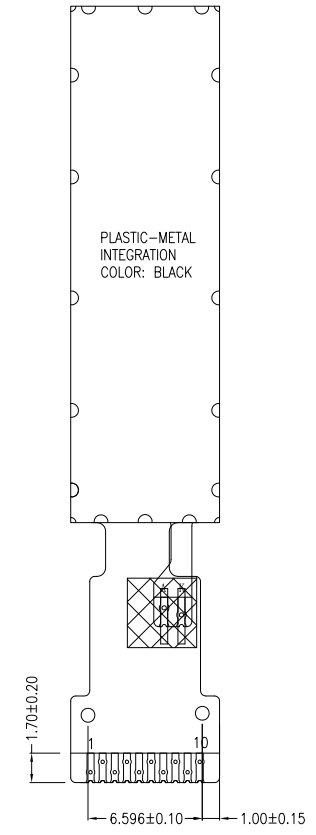
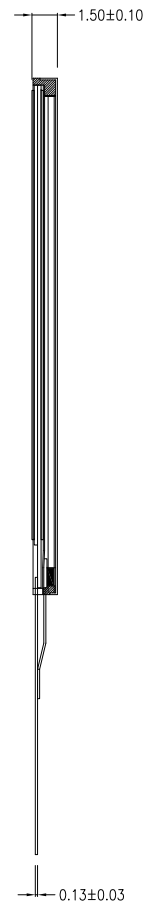


PIN DESCRIPTION	
PIN	SYMBOL
1	SDA
2	SCL
3	D/C
4	RES
5	CS
6	GND
7	VCC
8	LEDA
9	LEDK
10	GND

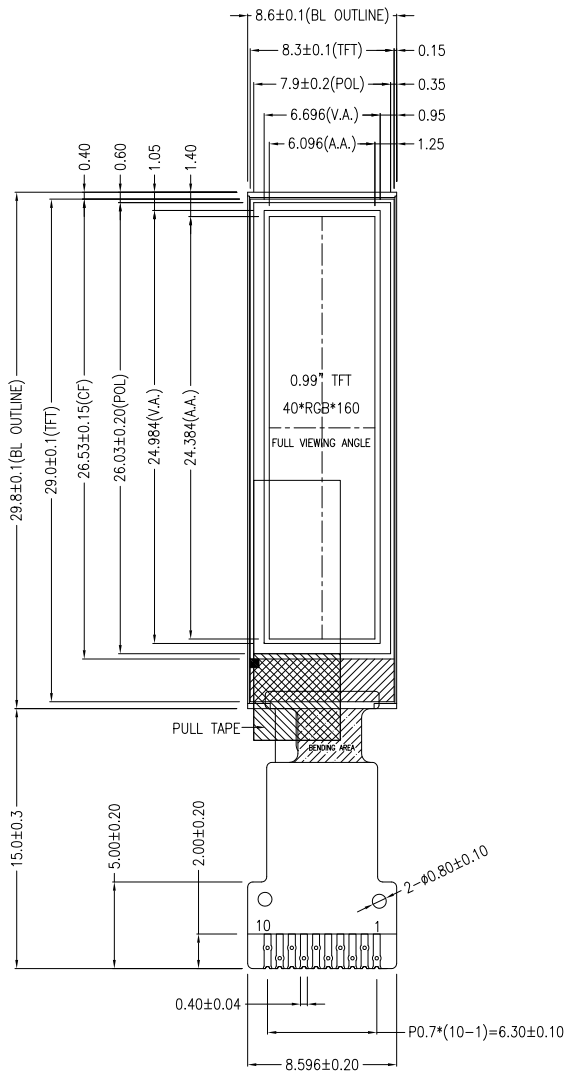

LED CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=2.8V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: GC9D01
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, IF=20mA, VF=3.0V(TYP.)
8. SURFACE LUMINANCE: 400 CD/M<sup>2</sup> (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. GENERAL TOLERANCE: ±0.20MM
12. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL	2023.02.18	MODULE P/N:
CHECKED BY:			MIO099AT-1
APPROVED BY:			DESCRIPTION:
VERSION NO:	02		TFT MODULE
		SCALE : 1/1	
		UNIT: mm	
		SHEET NO.: 1/1	

VER.	REVISED DESCRIPTION	REVISER	DATE
02	ADD TOP POLARIZER SURFACE TREATMENT	CAROL	2023.05.15
01	FIRST ISSUE	CAROL	2023.02.18