


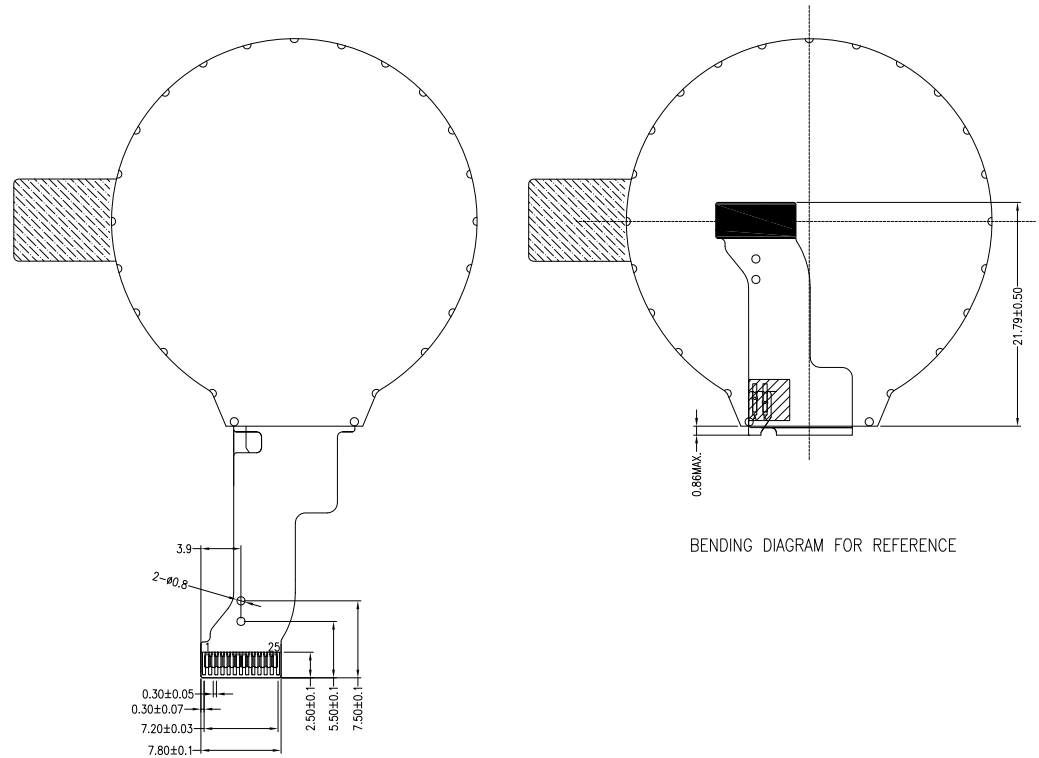


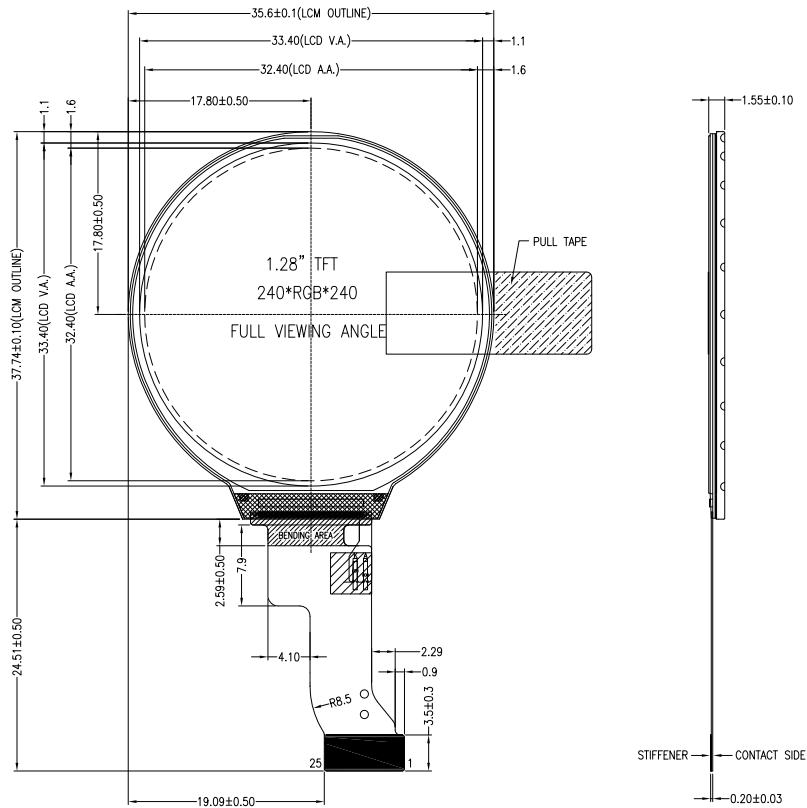

BENDING DIAGRAM FOR REFERENCE



PIXEL DETAIL
(SCALE 40:1)

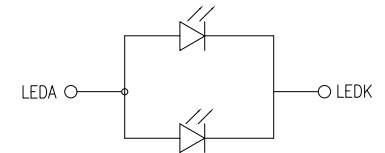

BACKLIGHT CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=2.8V, IOVCC=1.8V/2.8V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: GC9A01
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, IF=40mA, VF=2.9V~3.1V
8. SURFACE LUMINANCE: 350CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. UNMARKED TOLERANCE: ±0.2MM
12. ROHS COMPLIANT

PIN DESCRIPTION	
PIN	SYMBOL
1	NC
2	NC
3	NC
4	NC
5	NC
6	LEDK
7	LEDA
8	GND
9	VDD
10	IOVCC
11	TE
12	/CS
13	/RSTB
14	RS
15	WRB
16	RDB
17	DB0
18	DB1
19	DB2
20	DB3
21	DB4
22	DB5
23	DB6
24	DB7
25	GND

				MULTI-INNO TECHNOLOGY CO., LTD.	
DRAWN BY:	CAROL	2022.10.17		MODULE P/N:	
CHECKED BY:			SCALE : 1/1	MI0128BT-3	
APPROVED BY:			UNIT: mm	DESCRIPTION:	
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE	

01	FIRST ISSUE	CAROL	2022.10.17
VER.	REVISED DESCRIPTION	REVISER	DATE