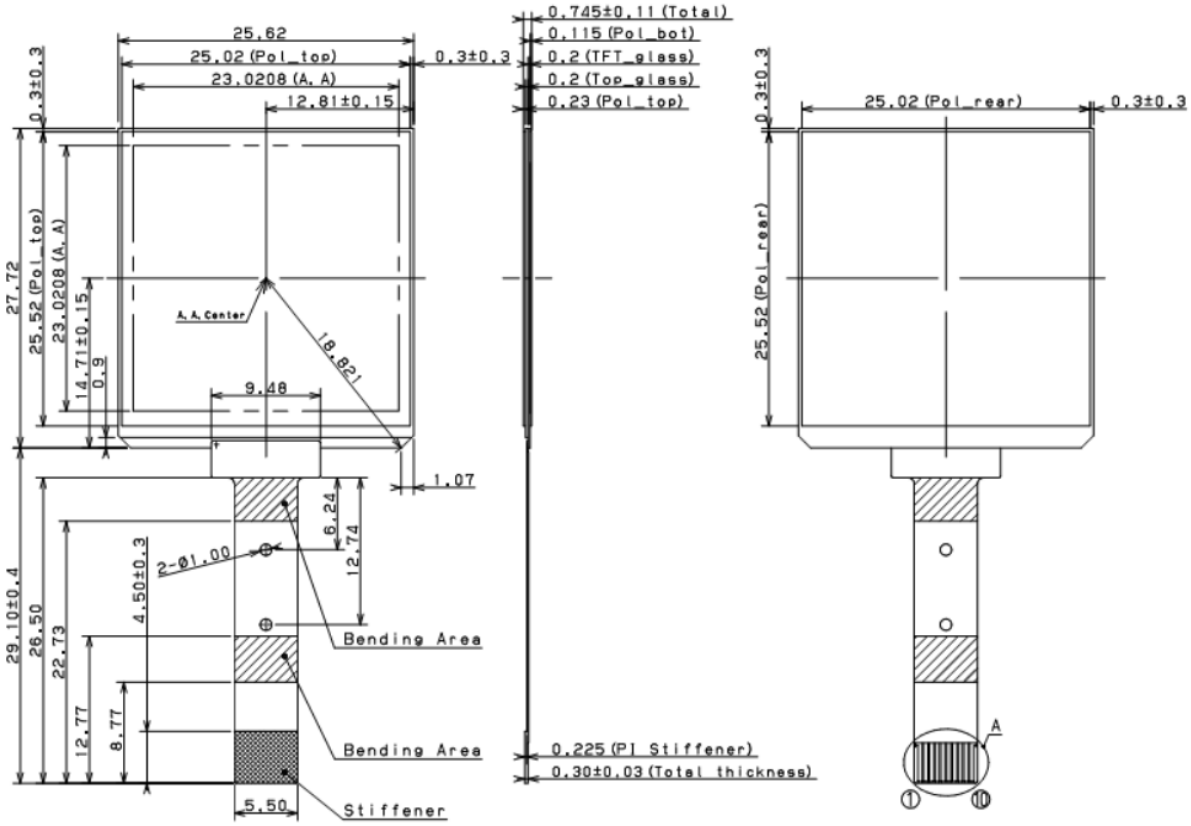

PIN	SYMBOL
1	SCLK
2	SI
3	SCS
4	EXTCOMIN
5	DISP
6	VDDA
7	VDD
8	EXTMODE
9	VSS
10	VSSA

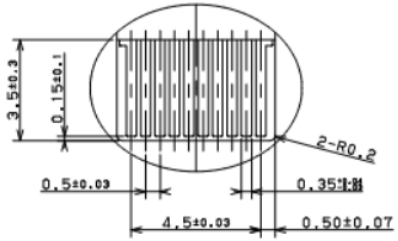

Detail A

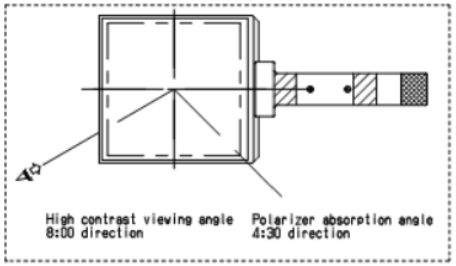

NOTES:

1. DISPLAY TYPE: TFT, REFLECTIVE ACTIVE MATRIX WITH SLIGHTLY TRANSMISSIVE OF WHITE AND BLACK
2. OPERATING VOLTAGE: VDD=VDDA=3.0V
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. IC DRIVER: DISPLAY CONTROL BY SERIAL DATA SIGNAL COMMUNICATION
5. OPERATING TEMP.: −20°C ~ 70°C
6. STORAGE TEMP.: −30°C ~ 80°C
7. LED BACKLIGHT: −
8. SURFACE LUMINANCE: TBD
9. TREATMENT OF TOP SURFACE: ANTI−GLARE
10. MINIMUM INSIDE BEND RADIUS: 0.45mm
11. GENERAL TOLERANCE: ±0.2mm
12. RoHS COMPLIANT

VER.	REVISED DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	RITA	2022.11.22

MULTI−INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA 2022.11.22		MODULE P/N: MI0128CT−1
CHECKED BY:		SCALE : 1/1	
APPROVED BY:		UNIT: mm	DESCRIPTION: TFT MODULE
VERSION NO:	01	SHEET NO.: 1/1	