

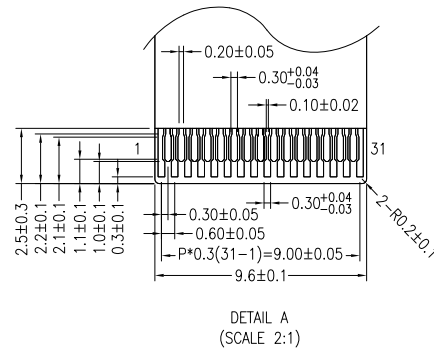
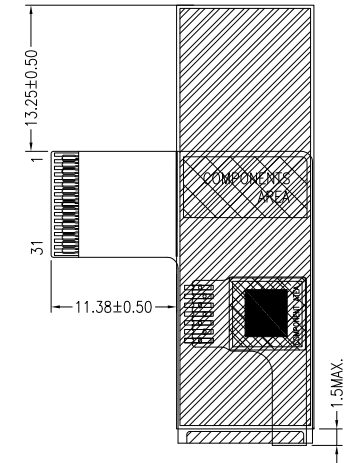


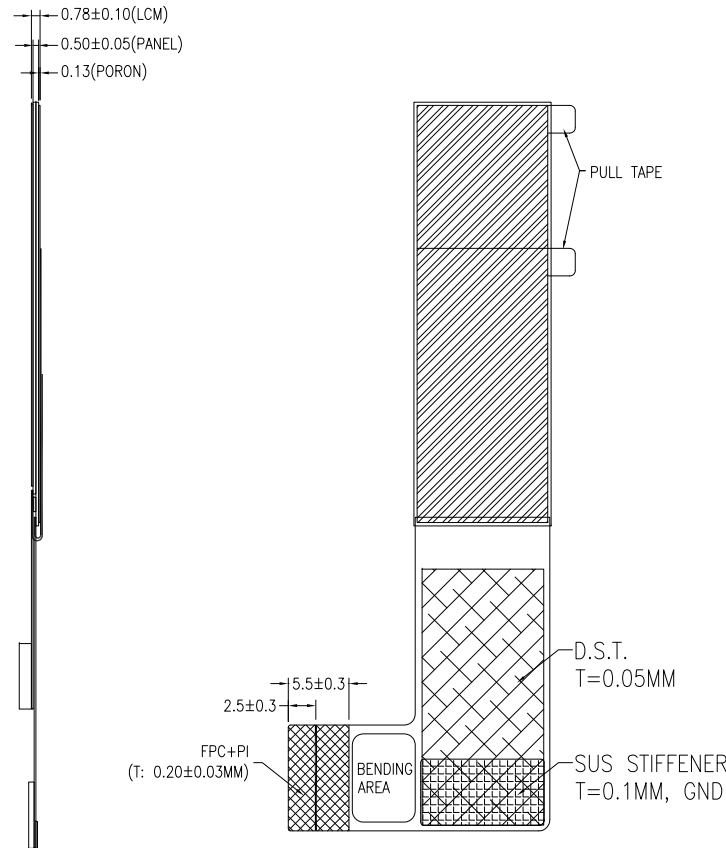

NOTES:

1. DISPLAY TYPE: LTPS AMOLED
2. COLOR: 16.7M
3. OPERATING VOLTAGE: VCI=3.3V (TYP.)
4. DRIVER IC: ICNA3306, TOUCH IC: CST820
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. INTERFACE: QSPI/SPI/DUAL SPI
8. RECOMMEND MATCHING CONNECTOR:
OCN OK-F302 31115 OR EQUIVALENT
9. UNMARKED TOLERANCE: ±0.3MM
10. ROHS COMPLIANT

PIN ASSIGNMENT	
PIN	SYMBOL
1	ELVSS
2	ELVSS
3	ELVDD
4	ELVDD
5	GND
6	MTP
7	GND
8	VCI
9	IOVCC
10	IM0
11	IM1
12	D0
13	CSX
14	GND
15	DCX
16	SDI_RDX
17	SDO
18	RESET
19	TE
20	SWIRE
21	GND
22	VDDI_TP
23	VDD_TP
24	RESET_TP
25	SCL_TP
26	SDA_TP
27	INT_TP
28	GND
29	GND
30	GND
31	GND

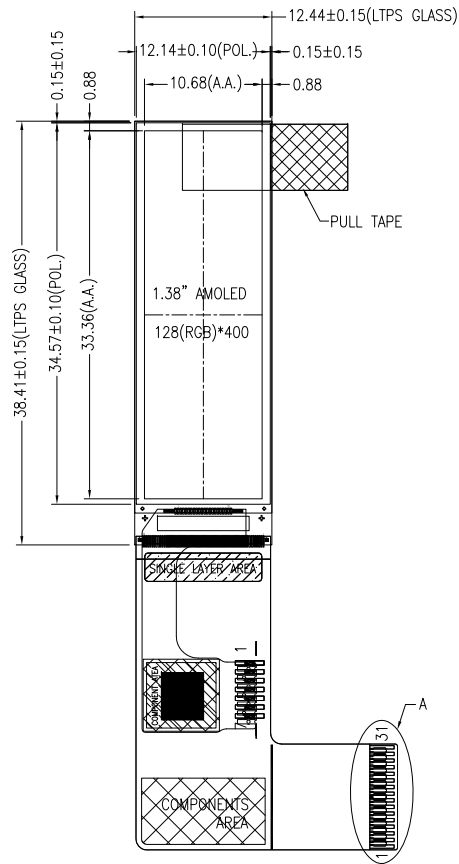

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2025.01.22		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0138A0-FCP
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE

01	FIRST ISSUE	RITA	2025.01.22
VER.	REVISED DESCRIPTION	REVISER	DATE