
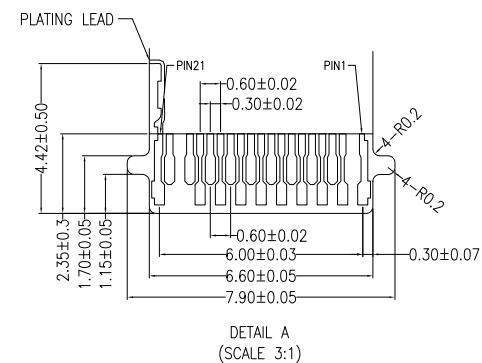
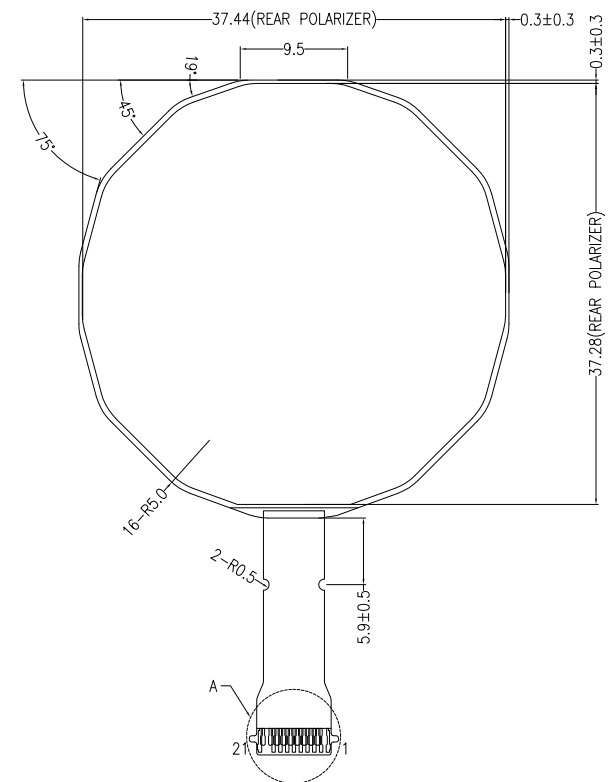


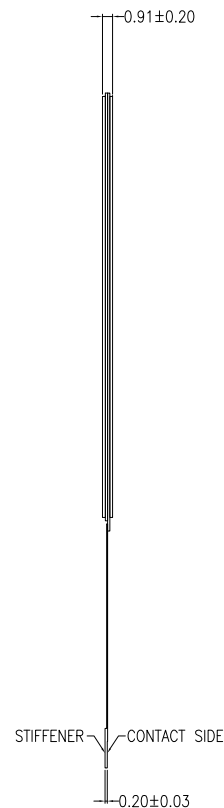

PIN DESCRIPTION	
PIN	SYMBOL
1	VDD2
2	—
3	GSP
4	GCK
5	GEN
6	INTB
7	VB
8	VA
9	VDD1
10	VSS
11	BSP
12	BCK
13	R[0]
14	R[1]
15	G[0]
16	G[1]
17	B[0]
18	B[1]
19	—
20	VCOM
21	NC

1. DISPLAY TYPE: 64-COLOR MIP TFT, REFLECTIVE WITH SLIGHTLY TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD1=3.2V, VDD2=5V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: INTERNAL MEMORY FOR DATA STORAGE WITHIN THE PANEL
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. TOP POLARIZER SURFACE TREATMENT: HC
8. RECOMMEND MATCHING CONNECTOR: MOLEX 503566-2100 OR EQUIVALENT
9. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
10. UNMARKED TOLERANCE: ±0.2MM
11. ROHS COMPLIANT

DETAIL A
(SCALE 4:1)

DETAIL A
(SCALE 3:1)

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY: CAROL		2022.07.18	
CHECKED BY:		 MODULE P/N: MI0139BT-1	
APPROVED BY:		SCALE: 1/1	
VERSION NO: 01		UNIT: mm	
		DESCRIPTION: TFT MODULE	

01	FIRST ISSUE	CAROL	2022.07.1
VER.	REVISED DESCRIPTION	REVISER	DATE