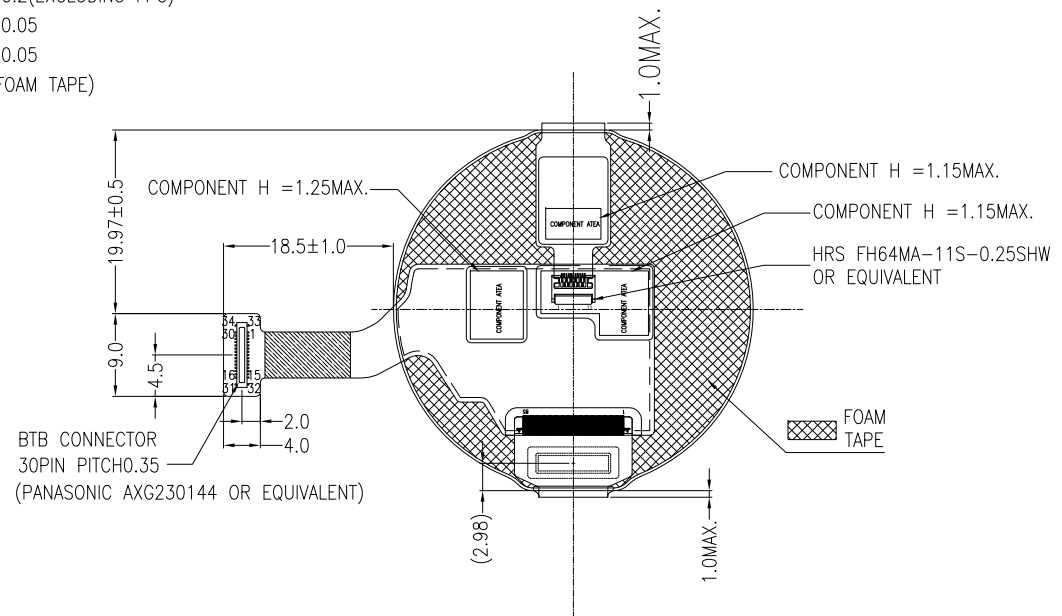

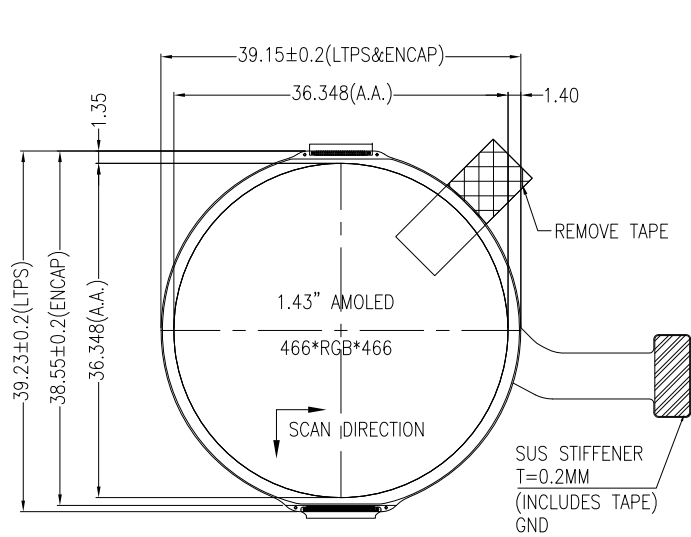


PIXEL DETAIL
(SCALE 100:1)

NOTES:

1. DISPLAY TYPE: LTPS AMOLED
2. COLOR: 16.7M
3. OPERATING VOLTAGE: VDD=2.8V (TYP.)
4. DRIVER IC: C05300, TOUCH IC: CST820
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. INTERFACE: 1-LANE MIPI
8. UNMARKED TOLERANCE: ±0.3MM
9. ROHS COMPLIANT

PIN ASSIGNMENT

PIN	SYMBOL
1	GND
2	GND
3	SCL_CTP
4	INT_CTP
5	GND
6	MIPI_CLKP
7	MIPI_CLKN
8	GND
9	MIPI_D0P
10	MIPI_D0N
11	GND
12	MTP
13	GND
14	ELVSS
15	ELVSS
16	ELVDD
17	ELVDD
18	VDD
19	VDDIO
20	RESET
21	TE
22	SWIRE
23	GND
24	NC
25	VDD_CTP
26	SWDIO_CTP
27	RESET_CTP
28	SDA_CTP
29	GND
30	GND



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2025.02.08		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0143A0-FCP
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE

01	FIRST ISSUE	RITA	2025.02.08
VER.	REVISED DESCRIPTION	REVISER	DATE