



PIN	DESCRIPTION
1	VBAT
2	VBAT
3	GND
4	DON
5	DOP
6	GND
7	CLKN
8	CLKP
9	GND
10	TE
11	RESET
12	VCL_EN
13	GND
14	VCI
15	TP_3V3
16	GND
17	IOVCC
18	MTP
19	TP_1V8
20	TP_SCL
21	TP_SDA
22	TP_RST
23	TP_INT
24	GND


正视图

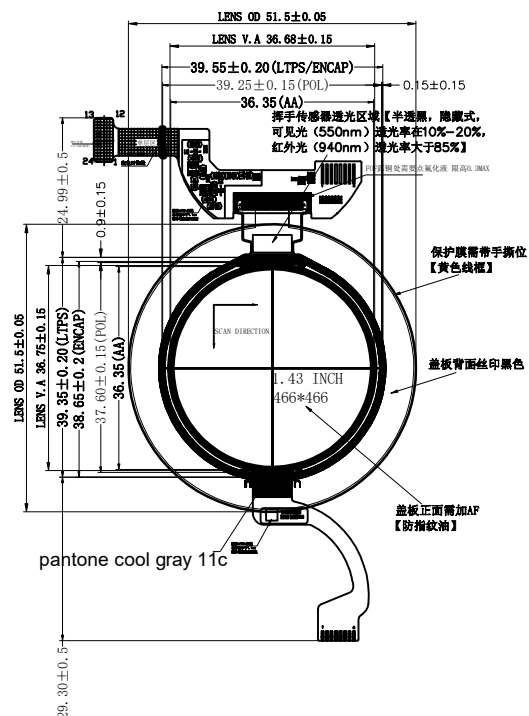


侧视图

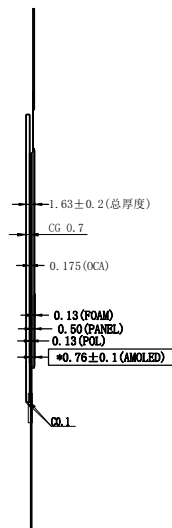

背视图

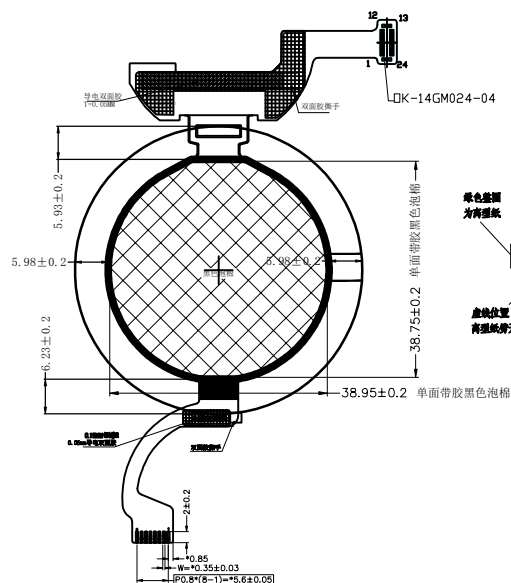

FPC弯折示意图

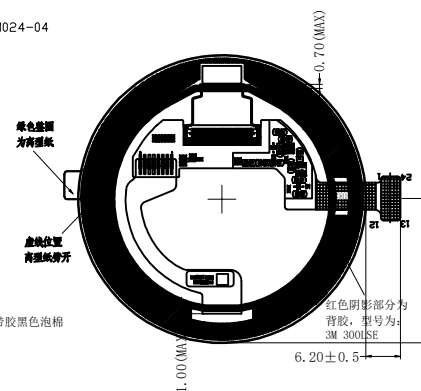

FPC弯折出货

NOTES (AMOLED):

1. DISPLAY TYPE: 1.43" LTPS-AMOLED
2. OPERATING VOLTAGE: VCI=3.3V (TYP.)
3. DRIVER IC: C05300AF-40
4. POWER IC: ERP5532A
5. OPERATING TEMP.: -20°C ~ 60°C
6. STORAGE TEMP.: -30°C ~ 70°C
7. INTERFACE: 1-LANE MIPI
8. GENERAL TOLERANCE: ±0.3MM
9. ROHS COMPLIANT

NOTES FOR CTP:

1. GLASS MATERIAL: PANDA
2. COVER GLASS + SENSOR GLASS + FPCA
3. DRIVER IC: FT3169
4. HARDNESS OF COVER SURFACE: $\geq 6H$ (750gf) $CS \geq 450$, $DOL \geq 10$

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL	2023.07.05	 MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI0143B0-FCP
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO.: 1/1	OLED + CTP MODULE

01	FIRST ISSUE	CAROL	2023.07.05
VER.	REVISED DESCRIPTION	REVISER	DATE