

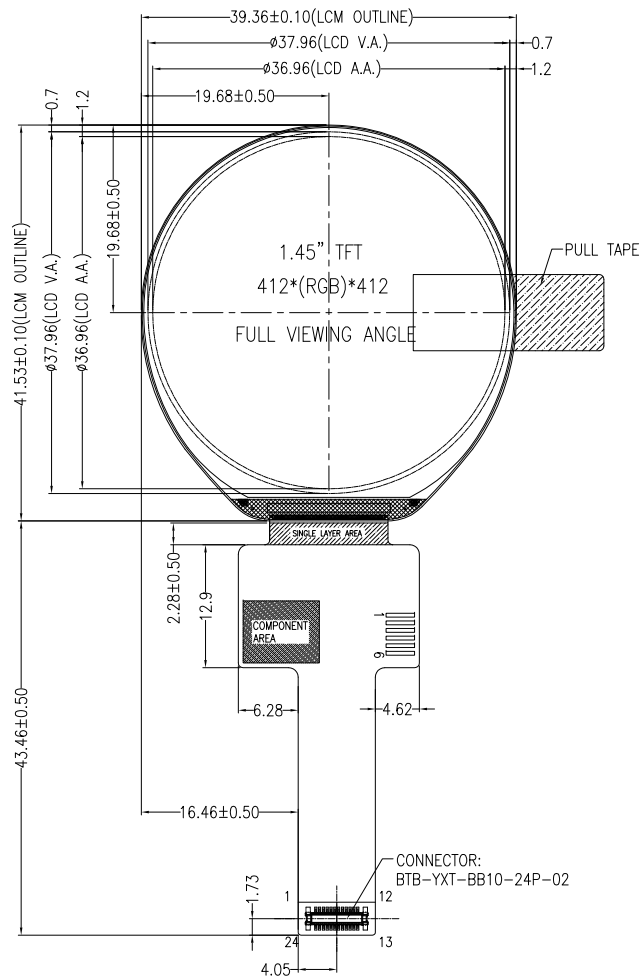

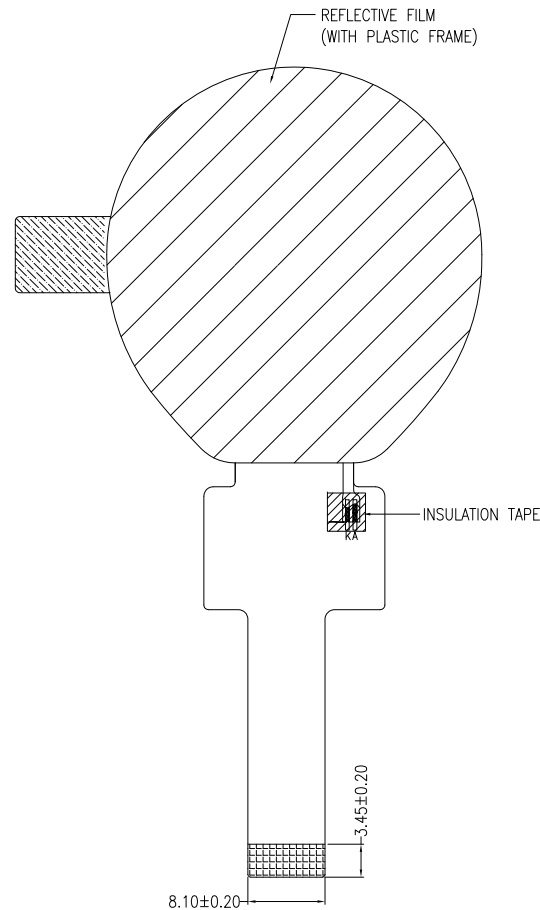




NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=2.8V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: SPD2010
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, IF=60mA, VF=2.9V~3.1V
8. SURFACE LUMINANCE: 450CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. UNMARKED TOLERANCE: ±0.2MM
12. ROHS COMPLIANT

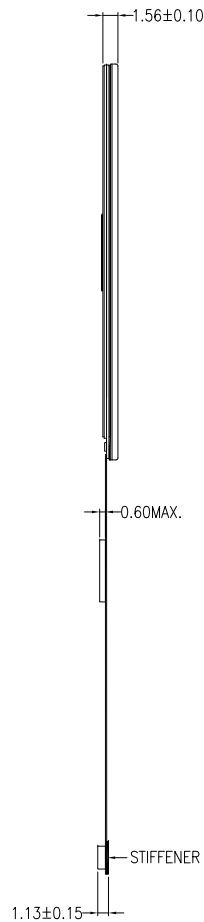

TFT PIN DESCRIPTION	
PIN	SYMBOL
1	LEDA
2	LEDK
3	GND
4	NC(TP_SCL)
5	NC(TP_SDA)
6	NC(TP_RST)
7	NC(TP_INT)
8	GND
9	VDD
10	VDD
11	GND
12	RESET
13	TE
14	NC
15	GND
16	SIO3
17	GND
18	SIO2
19	GND
20	NC
21	SPL_CLK
22	SIO1(MISO)
23	SIO0(MOSI/SDA)
24	SPL_CS



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2024.05.31	UNIT: mm	MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0145GT-3
APPROVED BY:			SHEET NO.: 1/1	DESCRIPTION:
VERSION NO:	01			TFT MODULE

01	FIRST ISSUE	CAROL	2024.05.31
VER.	REVISED DESCRIPTION	REVISOR	DATE