
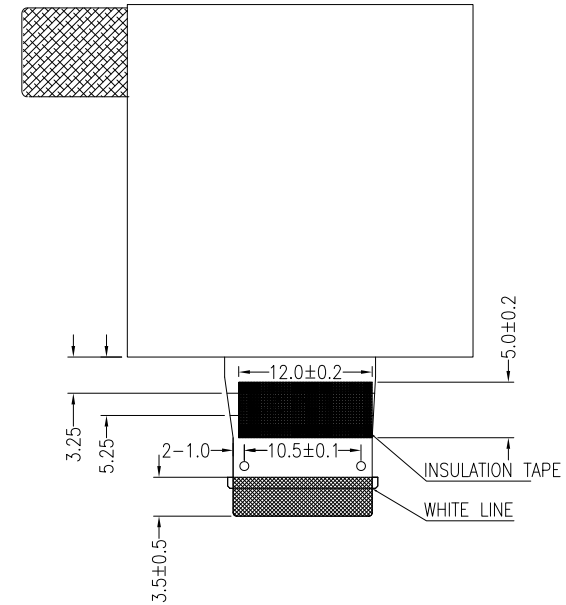
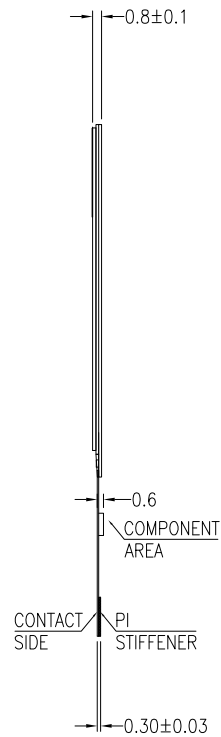


FOR ANY TOUCH PANEL OR OTHER ACCESSORIES ASSEMBLED WITH FRAME GLUE, A PERMANENT AND RELIABLE MECHANICAL STRUCTURE NEEDS TO BE DESIGNED ON CUSTOMER'S WHOLE MACHINE TO HOLD THEM IN PLACE TO AVOID LOOSE.

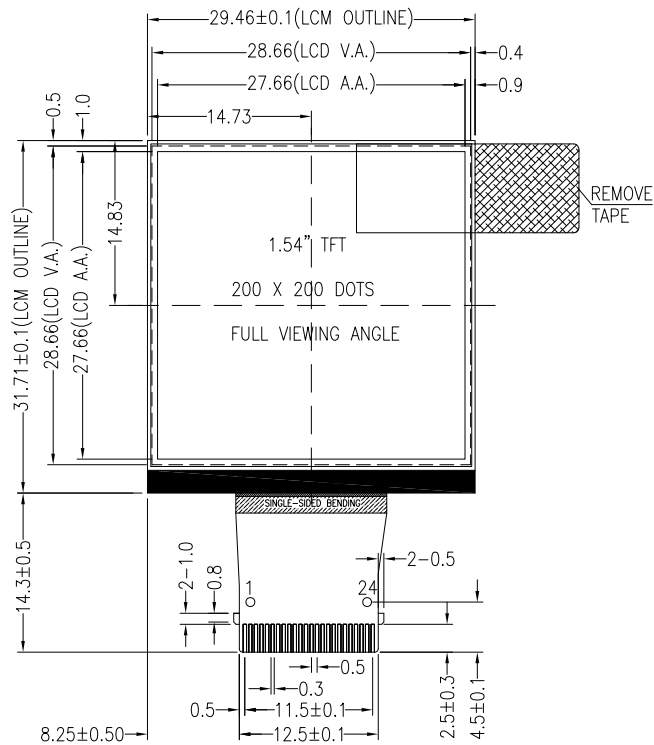

PIN ASSIGNMENT FOR LCM	
PIN	SYMBOL
1	NC
2	NC
3	NC
4	NC
5	VCC
6	NC
7	NC
8	NC
9	TE
10	LCD_RES
11	LCD_D/C
12	LCD_CS
13	LCD_SCLK
14	LCD_SDI
15	IOVCC
16	VCI
17	GND
18	VGH
19	NC
20	VIV
21	AVDD
22	VNV
23	NC
24	VGL

NOTES:

1. DISPLAY TYPE: MONO TFT, REFLECTIVE TYPE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=2.8V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: ST7305
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: -
8. SURFACE LUMINANCE: TBD
9. TOP POLARIZER SURFACE TREATMENT: GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. GENERAL TOLERANCE: ±0.3MM
12. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.				MODULE P/N:	
DRAWN BY:	RITA	2024.09.14	SCALE : 1/1	MI0154DT-2	
CHECKED BY:			UNIT: mm	DESCRIPTION:	
APPROVED BY:			SHEET NO.: 1/1	TFT MODULE	
VERSION NO:	01				

01	FIRST ISSUE	RITA	2024.09.14
VER.	REVISED DESCRIPTION	REVISER	DATE