
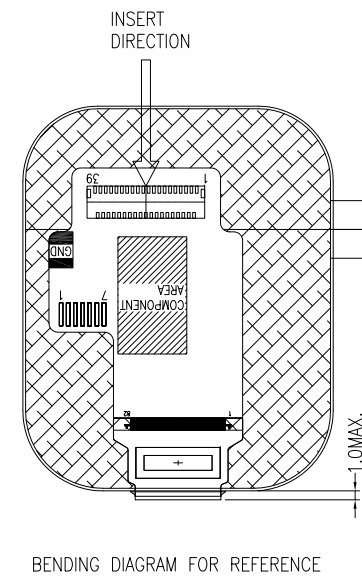
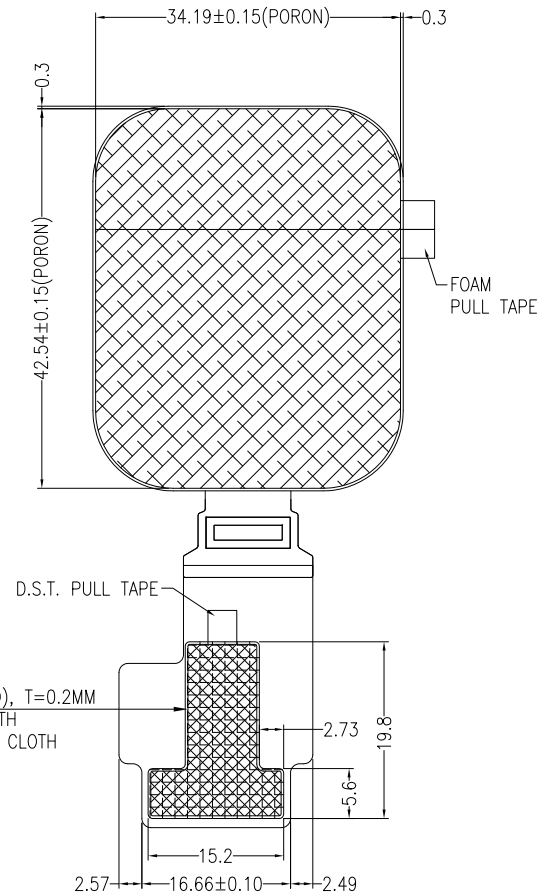
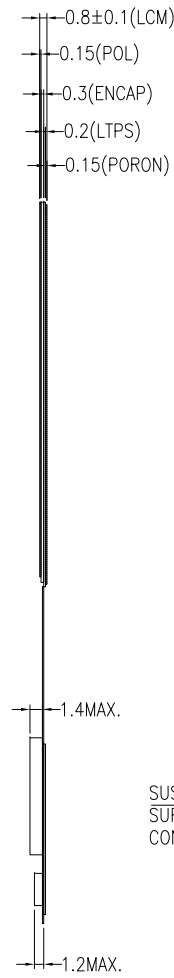


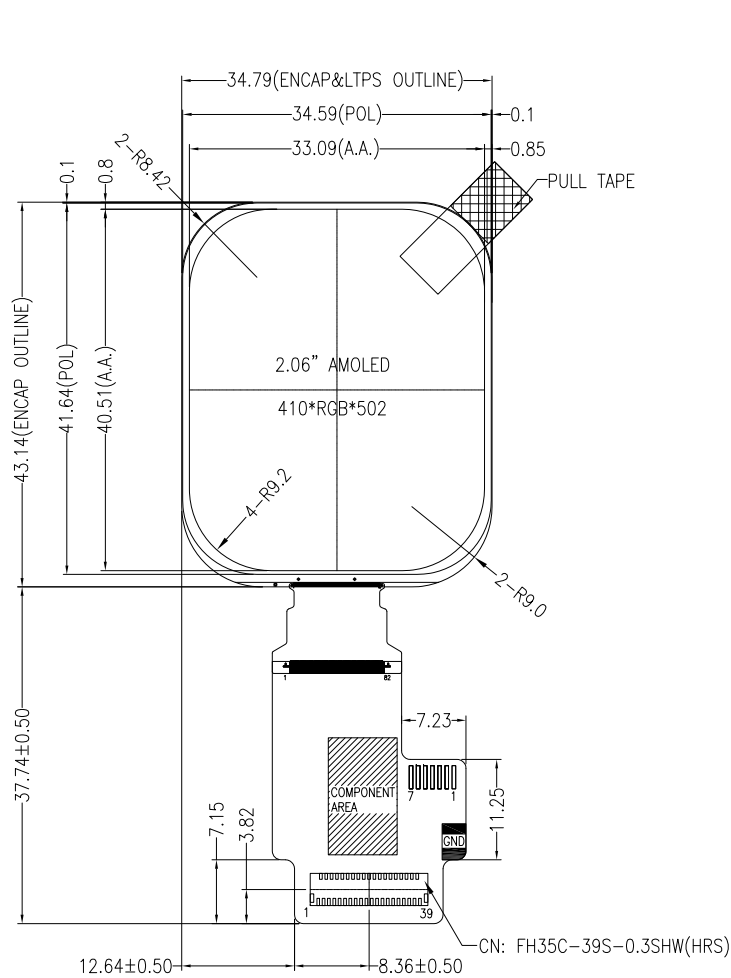

NOTES:

1. DISPLAY TYPE: AMOLED
2. VIEWING DIRECTION: FULL VIEWING ANGLE
3. DRIVER IC: C05300
4. POWER IC: BV6802
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. INTERFACE: MIPI, QSPI, 3-/4-WIRE SPI
8. SURFACE LUMINANCE: 600CD/M² (TYP.)
9. UNMARKED TOLERANCE: ±0.3MM
10. ROHS COMPLIANT

PIN DESCRIPTION	
PIN	SYMBOL
1	VCI
2	IOVCC
3	IMO
4	IM1
5	GND
6	GND
7	GND
8	D1P
9	D1N
10	GND
11	GND
12	CLKP
13	CLKN
14	GND
15	GND
16	DOP
17	DON
18	GND
19	GND
20	VBAT
21	GND
22	VCI_EN
23	D3
24	D2
25	CS
26	SCL
27	DCX
28	SDI
29	SDO
30	RESET
31	TE
32	MTP
33	GND
34	NC(TP_IOVCC)
35	NC(TP_RST)
36	NC(TP_VCC)
37	NC(TP_INT)
38	NC(TP_SCL)
39	NC(TP_SDA)

MULTI-INNO TECHNOLOGY CO., LTD.					
DRAWN BY: CAROL		2024.12.07		MODULE P/N:	
CHECKED BY:		SCALE : 1/1		MIO206AO-F	
APPROVED BY:		UNIT: mm		DESCRIPTION:	
VERSION NO: 01		SHEET NO.: 1/1		AMOLED MODULE	

01	FIRST ISSUE	CAROL	2024.12.07
VER.	REVISED DESCRIPTION	REVISER	DATE