



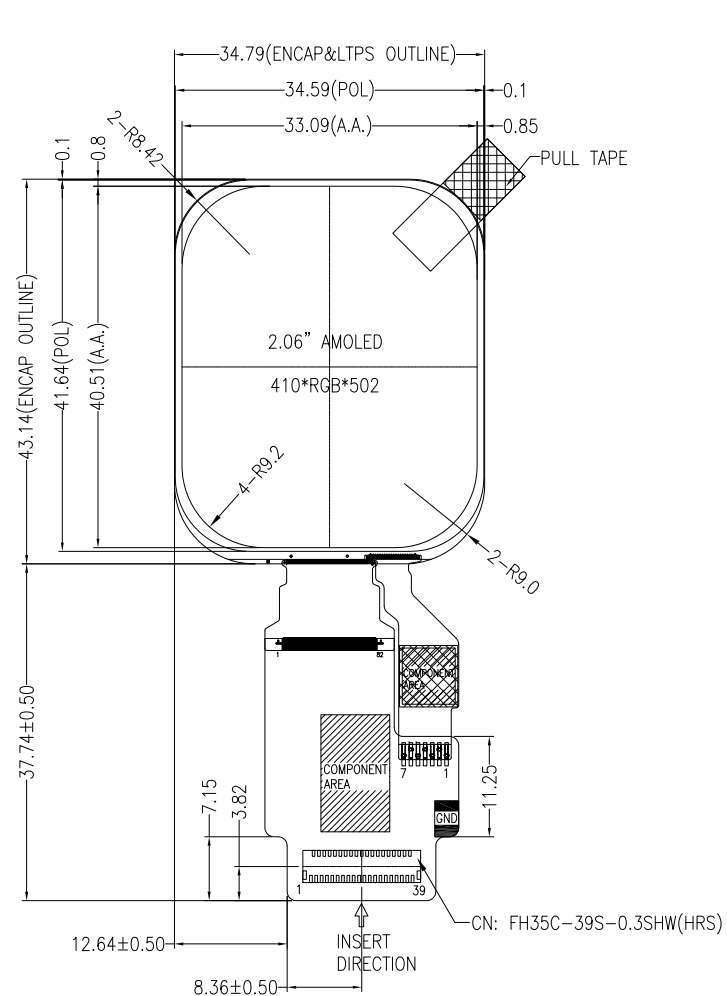

NOTES:

1. DISPLAY TYPE: AMOLED
2. VIEWING DIRECTION: FULL VIEWING ANGLE
3. DRIVER IC: C05300
4. POWER IC: BV6802
5. TOUCH IC: CST820
6. OPERATING TEMP.: -20°C ~ 70°C
7. STORAGE TEMP.: -30°C ~ 80°C
8. INTERFACE: MIPI, QSPI, 3-/4-WIRE SPI
9. SURFACE LUMINANCE: 600CD/M² (TYP.)
10. UNMARKED TOLERANCE: ±0.3MM
11. ROHS COMPLIANT

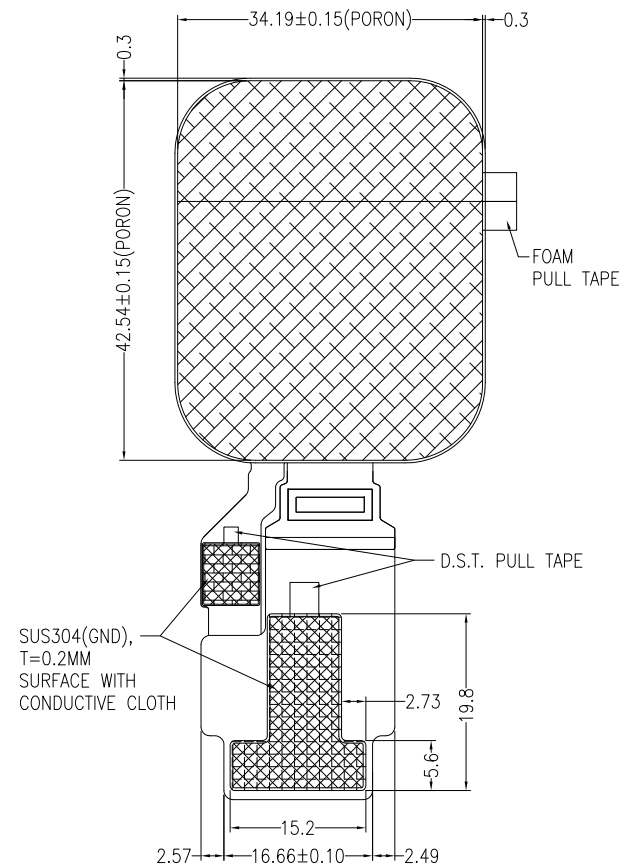

PIN DESCRIPTION	
PIN	SYMBOL
1	VCI
2	IOVCC
3	IMO
4	IM1
5	GND
6	GND
7	GND
8	D1P
9	D1N
10	GND
11	GND
12	CLKP
13	CLKN
14	GND
15	GND
16	DOP
17	DON
18	GND
19	GND
20	VBAT
21	GND
22	VCI_EN
23	D3
24	D2
25	CS
26	SCL
27	DCX
28	SDI
29	SDO
30	RESET
31	TE
32	MTP
33	GND
34	TP_IOVCC
35	TP_RST
36	TP_VCC
37	TP_INT
38	TP_SCL
39	TP_SDA



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2025.03.21	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI0206AO-FCP
APPROVED BY:			SHEET NO.: 1/1	DESCRIPTION:
VERSION NO:	01			AMOLED +CTP MODULE

01	FIRST ISSUE	CAROL	2025.03.21
VER.	REVISED DESCRIPTION	REVISER	DATE