



DETAIL A  
SCALE 50:1

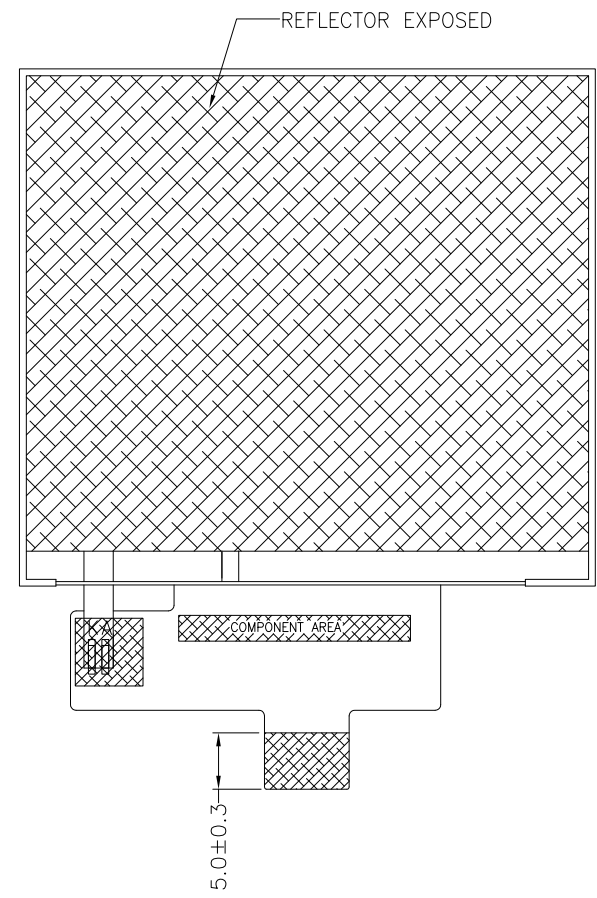

BACKLIGHT CIRCUIT DIAGRAM

PIN DESCRIPTION	
PIN	SYMBOL
1	NC
2	NC
3	NC
4	NC
5	NC
6	VSS
7	VDD
8	SDA
9	SCK
10	CD
11	/RST
12	/CS
13	LEDA
14	LEDK

NOTES:

1. DISPLAY TYPE: TN TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=2.8V
3. VIEWING DIRECTION: 6 O'CLOCK
4. DRIVER IC: ILI9342C
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: 4-CHIP WHITE LED, If=80mA, Vf=3.2V(TYP.)
8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
9. SURFACE LUMINANCE: 550CD/M<sup>2</sup>(TYP)
10. THE SINGLE LAYER AREA OF FPC IS BENDABLE AND THE BENDING RADIUS MUST BE NOT LESS THAN 1.5MM
11. GENERAL TOLERANCE: ±0.2MM
12. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2021.04.29		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0230FT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE

01	FIRST ISSUE	CAROL	2021.04.29
VER.	REVISED DESCRIPTION	REVISER	DATE