

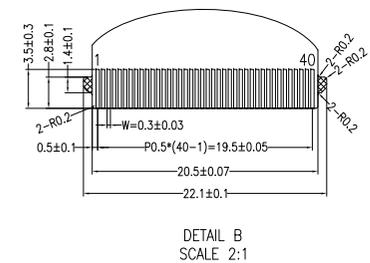

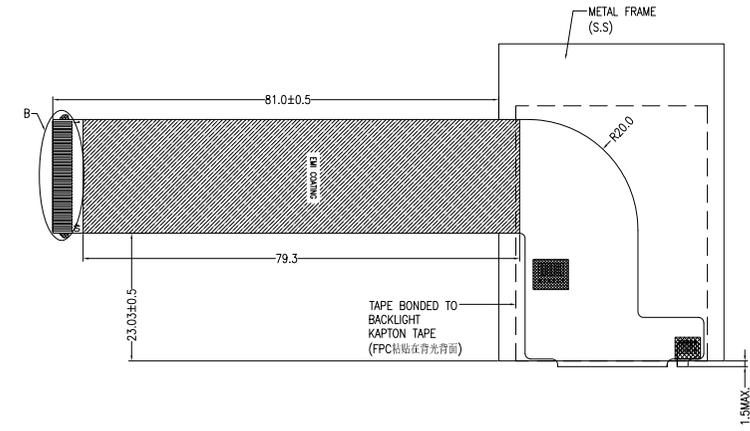
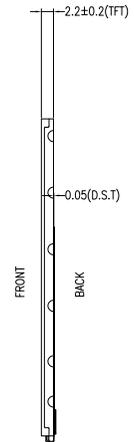


PIN	DESCRIPTION
1	GND
2	NC(TP_RST)
3	NC(TP_INT)
4	NC(TP_SCL)
5	NC(TP_SDA)
6	GND
7	VCI
8	IOVCC
9	RESET
10	CS
11	SCL
12	VS
13	HS
14	EN
15	DOTCLK
16	SDA
17	DB0(B0)
18	DB1(B1)
19	DB2(B2)
20	DB3(B3)
21	DB4(B4)
22	DB5(B5)
23	DB6(G0)
24	DB7(G1)
25	DB8(G2)
26	DB9(G3)
27	DB10(G4)
28	DB11(G5)
29	DB12(R0)
30	DB13(R1)
31	DB14(R2)
32	DB15(R3)
33	DB16(R4)
34	DB17(R5)
35	SDO
36	LEDA
37	LEDK1
38	LEDK2
39	LEDK3
40	LEDK4

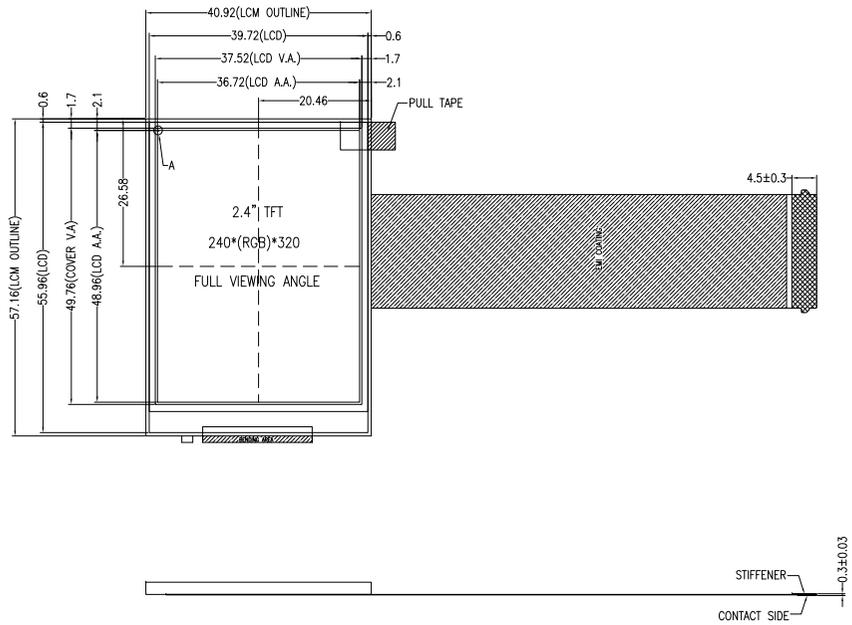

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCI=2.8V (TYP.), IOVCC=1.8V
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: S17789V2
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -30°C ~ 85°C
7. INTERFACE: 3-WIRE SPI + 18-BIT RGB
8. LED BACKLIGHT: 4-CHIP WHITE LED, If=80mA, Vf=2.8V~3.4V
9. SURFACE LUMINANCE: 500 CD/M² (TYP.)
10. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
11. RECOMMEND MATCHING CONNECTOR: FH28-40S-0.5SH
12. THE SINGLE LAYER AREA OF FPC IS BENDABLE AND THE BENDING RADIUS MUST BE NOT LESS THAN 1.5MM
13. GENERAL TOLERANCE: ±0.2MM
14. ROHS COMPLIANT

MIT MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2022.08.01		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0240BGT-5
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE

01	FIRST ISSUE	CAROL	2022.08.01
VER.	REVISED DESCRIPTION	REVISER	DATE