

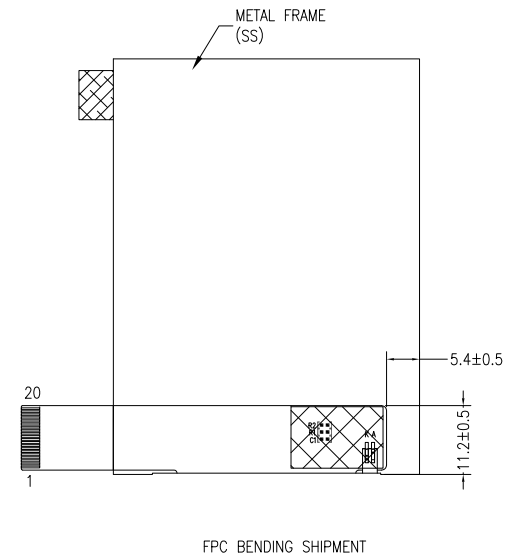
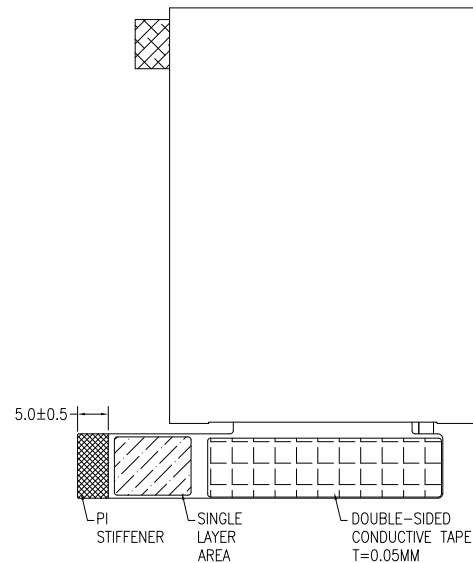
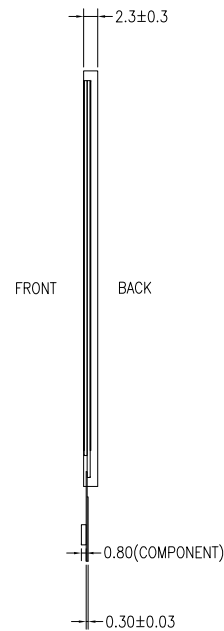
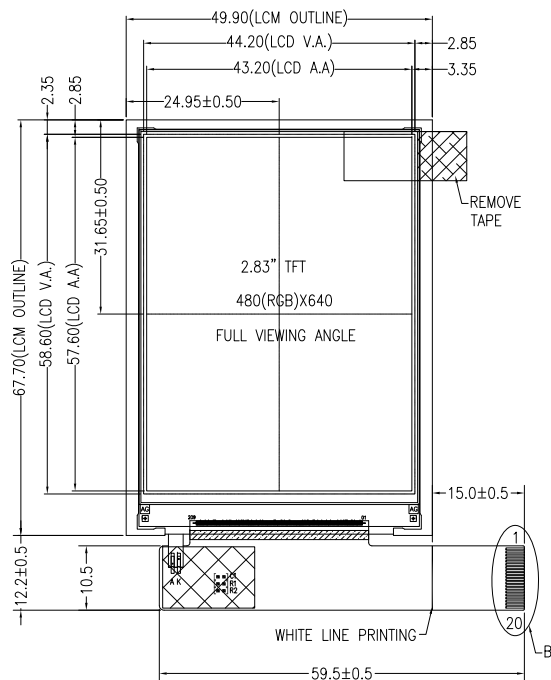




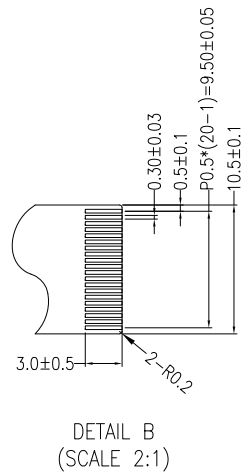

PIN ASSIGNMENT	
PIN	SYMBOL
1	GND
2	MIPI_D1P
3	MIPI_D1N
4	GND
5	MIPI_CLKP
6	MIPI_CLKN
7	GND
8	MIPI_D0P
9	MIPI_D0N
10	GND
11	TE
12	RESET
13	LCM_ID
14	GND
15	VCI
16	IOVCC
17	GND
18	LDEK
19	LEDA
20	GND

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCI=2.8V(TYP.), IOVCC=1.8V(TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: ST7701S
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT TYPE: WHITE DUAL-DICE LED, IF=40mA, VF=16.8V~19.8V
8. SURFACE LUMINANCE: 1000CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. GENERAL TOLERANCE: ±0.2MM
12. ROHS COMPLIANT



 MULTI-INNO TECHNOLOGY CO.,LTD.					
DRAWN BY:	RITA	2025.02.13		MODULE P/N:	
CHECKED BY:			SCALE : 1/1	MI0283AHT-3	
APPROVED BY:			UNIT: mm	DESCRIPTION:	
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE	

01	FIRST ISSUE	RITA	2025.02.13
VER.	REVISED DESCRIPTION	REVISOR	DATE