

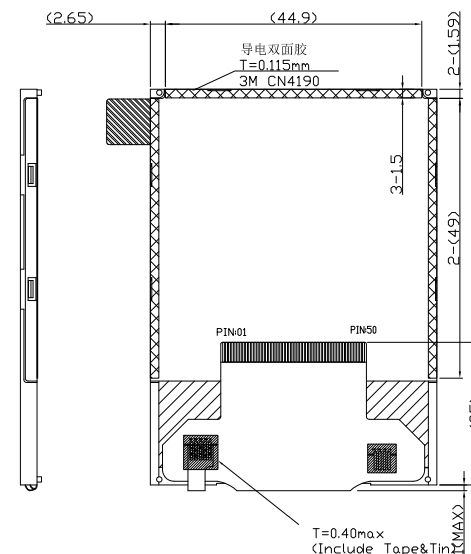
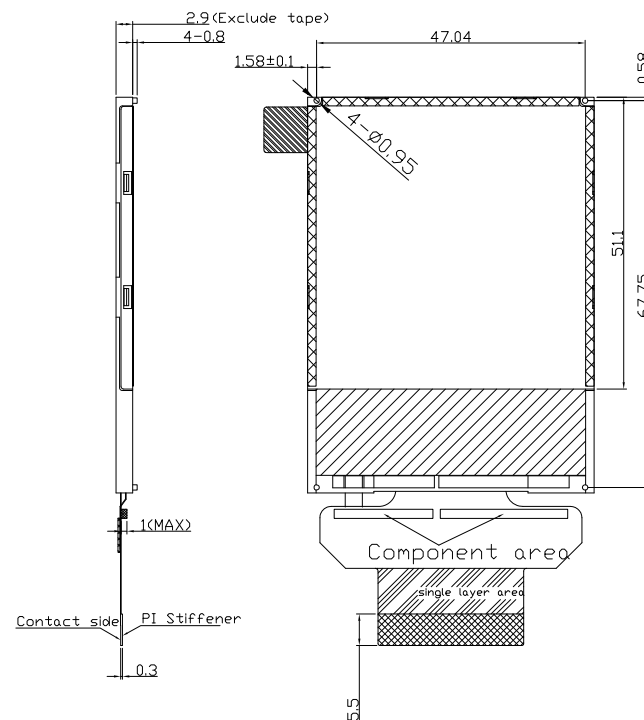



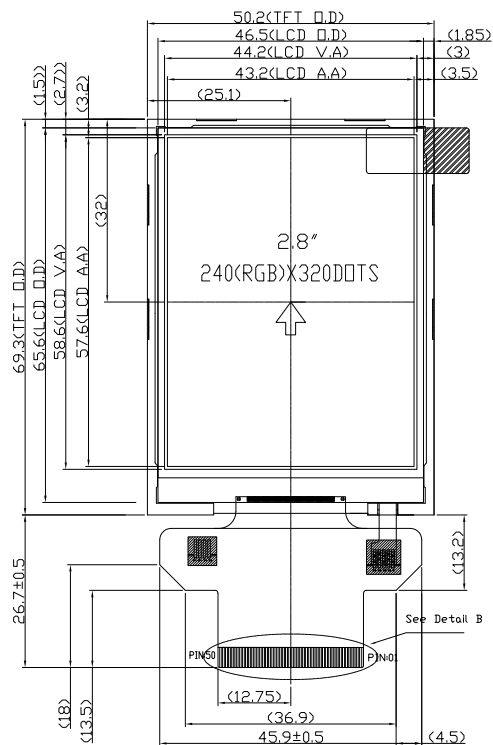


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE/POSITIVE
2. VIEWING DIRECTION: 6:00 O'CLOCK
3. DRIVE METHOD: 1/320 DUTY
4. OPERATING VOLTAGE: IOVCC=2.8V(TYP), VCC=2.8V,VCI=2.8V
5. OPERATING TEMP.: -20°C -- +70°C
6. STORAGE TEMP.: -30°C -- +80°C
7. LCD DRIVE IC: ILI9341V
8. CONNECTION: FPC
9. BACKLIGHT: 4CHIP-WHITE LED/80mA/3.2V(TYP)
10. TOP POLARIZER SURFACE TREATMENT: GLARE.
11. SURFACE LUMINANCE: 300cd/m²
12. GENERAL TOLERANCE: ±0.20
13. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



Detail B
Scale 2:1



TFT I/O PINS:	
1	LEDK
2	LEDA1
3	LEDA2
4	LEDA3
5	LEDA4
6	IM0
7	IM1
8	IM2
9	IM3
10	RESET
11	VSYNC
12	HSYNC
13	DOTCLK
14	DE
15	DB17
16	DB16
17	DB15
18	DB14
19	DB13
20	DB12
21	DB11
22	DB10
23	DB9
24	DB8
25	DB7
26	DB6
27	DB5
28	DB4
29	DB3
30	DB2
31	DB1
32	DB0
33	SDO
34	SDI
35	RD
36	WRX(D/CX)
37	D/CX(SCL)
38	CSX
39	TE
40	VDDI
41	VDDI
42	VCI
43	GND
44	X+(NC)
45	Y+(NC)
46	X-(NC)
47	Y-(NC)
48	GND
49	GND
50	GND



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	RITA	2016.10.28	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	MIO283Q1T-13
APPROVED BY:			mm	DESCRIPTION:
VERSION NO:	01			TFT MODULE

01	First issue	2013.10.28
VER.	REVISED DESCRIPTION	DATE