

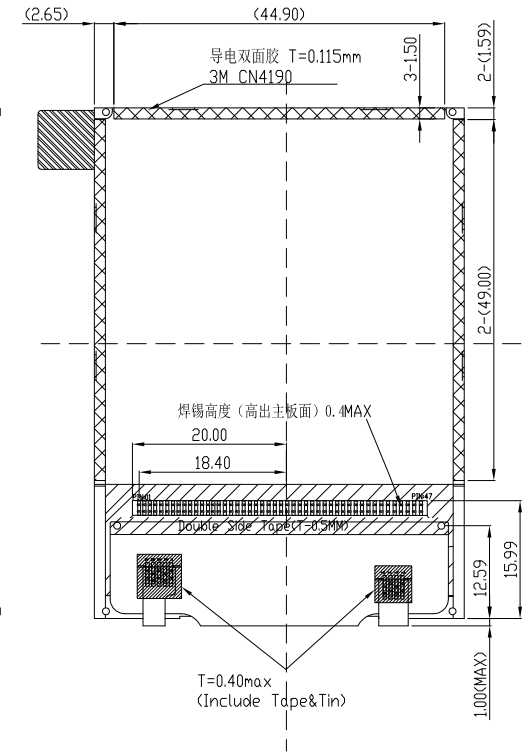
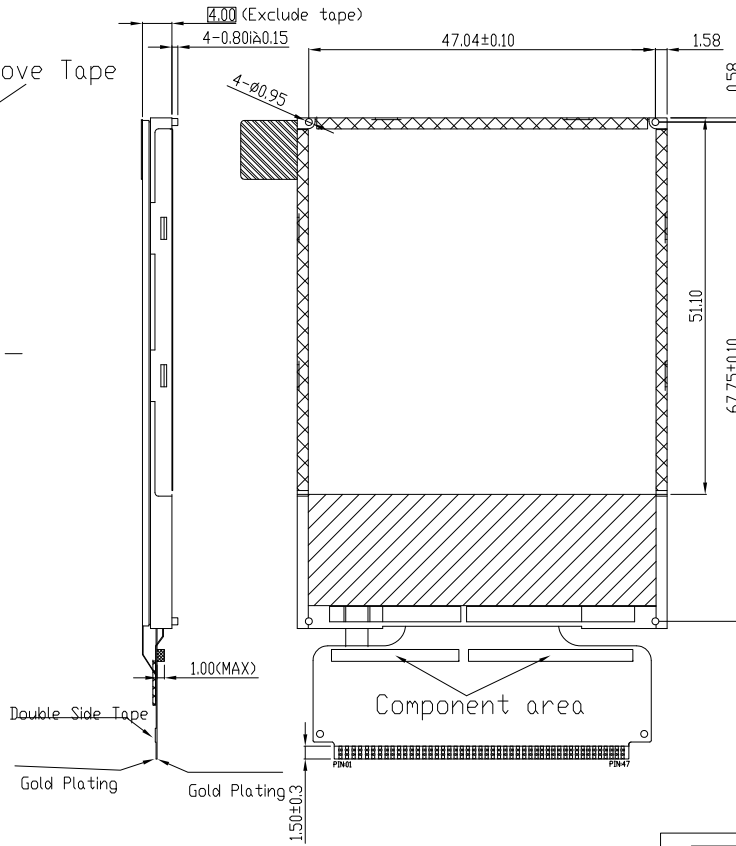


1	LEDK
2	LEDA1
3	LEDA2
4	LEDA3
5	LEDA4
6	IMO
7	IM3
8	IM2
9	IM1
10	RESET
11	VSYNC
12	HSYNC
13	DOTCLK
14	DE
15	DB17
16	DB16
17	DB15
18	DB14
19	DB13
20	DB12
21	DB11
22	DB10
23	DB9
24	DB8
25	DB7
26	DB6
27	DB5
28	DB4
29	DB3
30	DB2
31	DB1
32	DB0
33	SDO
34	SDI
35	RD
36	WRX(D/CX)
37	D/CX(SCL)
38	CS
39	TE
40	VDDI
41	VDDI
42	VCI
43	GND
44	X+
45	Y+
46	X-
47	Y-


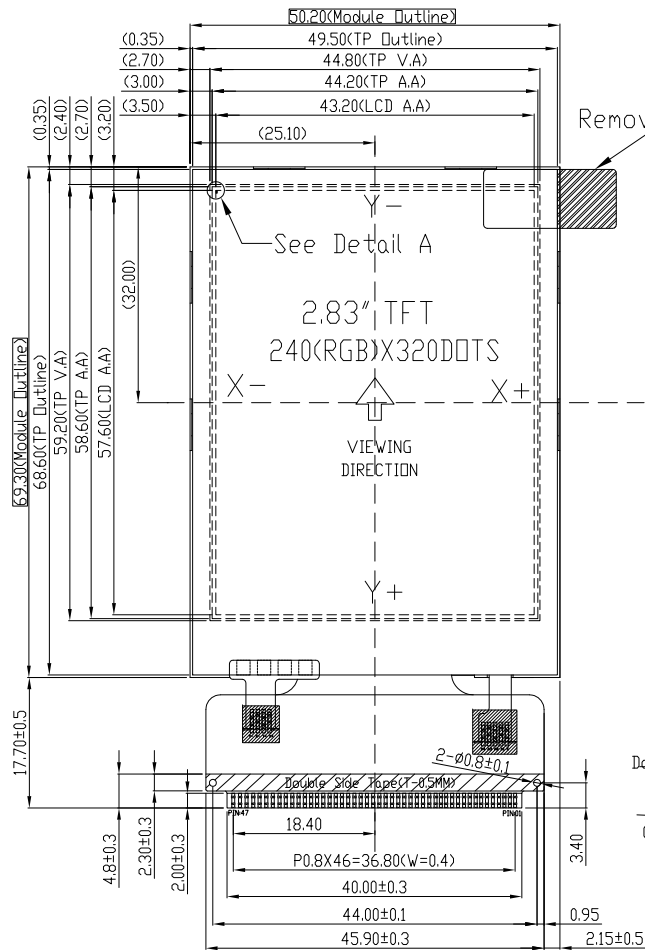


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE/POSITIVE
2. VIEWING DIRECTION: 6:00 O'CLOCK
3. DRIVE METHOD: 1/320 DUTY
4. OPERATING VOLTAGE: IOVCC=2.8V(TYP), VCC=2.8V,VCI=2.8V
5. OPERATING TEMP.: -20°C -- +70°C
6. STORAGE TEMP.: -30°C -- +80°C
7. LCD DRIVE IC: ILI9341V
8. CONNECTION: FPC
9. BACKLIGHT: 4CHIP-WHITE LED/80mA/3.2V(TYP)
10. TOP POLARIZER SURFACE TREATMENT: GLARE.
11. SURFACE LUMINANCE: 240cd/m²
12. UNMARKED TOLERANCE: ±0.20
13. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS
14. THE CONTROLLED DIMENSION MASK TO BE ☐
15. REFERENCE DIMENSION MASK TO BE ()



Detail A
Scale 20:1



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	RITA	2016.11.02	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI0283Q1T-9ARP
APPROVED BY:				DESCRIPTION:
VERSION NO:	01			TFT MODULE

01	FIRST ISSUE	2016.11.02
VER.	REVISED DESCRIPTION	DATE