
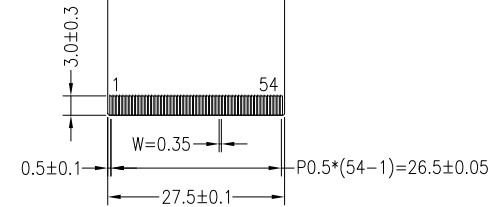


PIXEL DETAIL  
(SCALE 50:1)

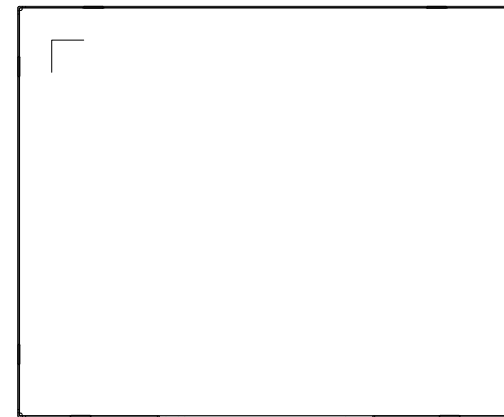

LEDA → → → → → LEDK

LED CIRCUIT DIAGRAM

PIN DESCRIPTION			
PIN	SYMBOL	PIN	SYMBOL
1	LEDK	28	R0
2	LEDK	29	R1
3	LEDA	30	R2
4	LEDA	31	R3
5	NC	32	R4
6	NC	33	R5
7	NC	34	R6
8	RESET	35	R7
9	SPENA	36	HSYNC
10	SPCLK	37	VSYNC
11	SPDAT	38	DCLK
12	B0	39	NC
13	B1	40	NC
14	B2	41	VDD
15	B3	42	VDD
16	B4	43	NC
17	B5	44	NC
18	B6	45	NC
19	B7	46	NC
20	G0	47	NC
21	G1	48	SEL2
22	G2	49	SEL1
23	G3	50	SELO
24	G4	51	NC
25	G5	52	DEN
26	G6	53	GND
27	G7	54	GND

NOTES:

- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
- OPERATING VOLTAGE: VDD=3.3V (TYP.)
- VIEWING DIRECTION: 12 O'CLOCK
- DRIVER IC: HX8238D
- OPERATING TEMP.: -20°C ~ 70°C
- STORAGE TEMP.: -30°C ~ 80°C
- LED BACKLIGHT: 6-CHIP WHITE LED, IF=20mA, VF=19.2V
- SURFACE LUMINANCE: 300CD/M<sup>2</sup> (TYP.)
- TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
- GENERAL TOLERANCE: ±0.2MM
- ROHS COMPLIANT

**MI** MULTI-INNO TECHNOLOGY CO., LTD.

02 CORRECT FPC LENGTH, MODULE THICKNESS, AND DISTANCE BETWEEN AA AREA OF AXIS Y TO TFT OUTLINE. CHANGE THE BACKLIGHT		CAROL	2016.03.11	DRAWN BY:	CAROL	2012.11.04	SCALE : 1/1	MODULE P/N:	MI0350AGT-1
01 FIRST ISSUE		CAROL	2012.11.04	CHECKED BY:			UNIT: mm	DESCRIPTION:	TFT MODULE
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	02		SHEET NO.: 1/1		