



DETAIL A
(SCALE 50:1)

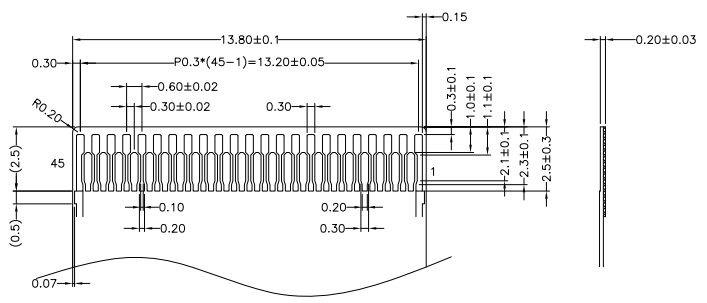

DETAIL B
(SCALE 4:1)



BACKLIGHT CIRCUIT DIAGRAM

PIN ASSIGNMENT	
PIN NO	SYMBOL
1	GND
2	LEDA
3	LEDA
4	LEDK
5	LEDK
6	GND
7	GND
8	VCC
9	IOVCC
10	RESET
11	VSYN
12	HSYN
13	GND
14	DOTCLK
15	GND
16	DE
17	DB17
18	DB16
19	DB15
20	DB14
21	DB13
22	DB12
23	DB11
24	DB10
25	DB9
26	DB8
27	DB7
28	DB6
29	DB5
30	DB4
31	DB3
32	DB2
33	DB1
34	DB0
35	SDO
36	SDI
37	RDX
38	WRX/SCL
39	D/CX
40	CSX
41	TE
42	XR
43	YD
44	XL
45	YU

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK.
 2. OPERATING VOLTAGE: VCC=2.8V; IOVCC=1.8V/2.8V.
 3. VIEWING DIRECTION: FULL VIEWING ANGLE.
 4. IC DRIVER: HX8357D.
 5. OPERATING TEMP: -20°C ~ 70°C.
 6. STORAGE TEMP: -30°C ~ 80°C.
 7. BACKLIGHT: 6-WHITE LED, If=40mA, Vf=17.4V~19.8V.
 8. SURFACE LUMINANCE: 560cd/m²(TYP)
 9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
 10. GENERAL TOLERANCE: ±0.2mm.
 11. ROHS COMPLIANT.

MULTI-INNO TECHNOLOGY CO.,LTD.			
DRAWN BY:	RITA	2017.11.28	SCALE : 1/1
CHECKED BY:			UNIT: mm
APPROVED BY:			DESCRIPTION: TFT MODULE
VER.	FIRST ISSUE	RITA	2017.11.28
VER.	REVISED DESCRIPTION	REVISER	DATE
		VERSION NO:	01