

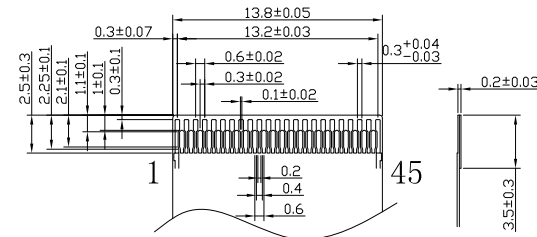




2.2±0.2<EXCLUDE FPC & TAPE>

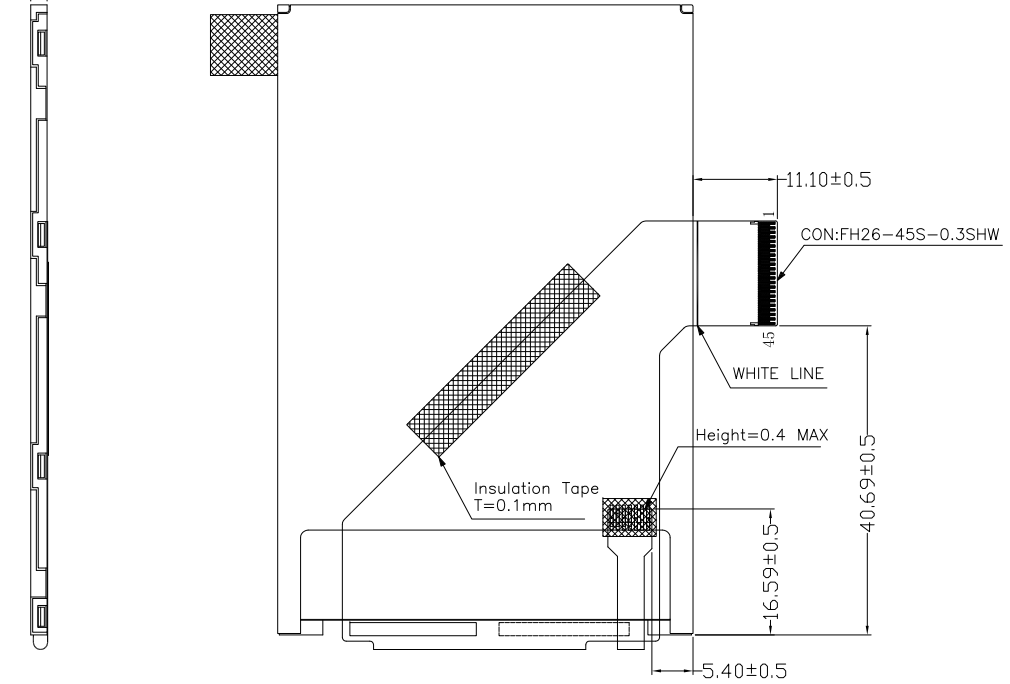



LED CIRCUIT DIAGRAM

| PIN NO | SYMBOL | PIN DESCRIPTION |
|--------|--------|-----------------|
| 1 | FLM | |
| 2 | GND | |
| 3 | ENABLE | |
| 4 | DOTCLK | |
| 5 | VSYNC | |
| 6 | GND | |
| 7 | HSYNC | |
| 8 | IM0 | |
| 9 | IM1 | |
| 10 | IM2 | |
| 11 | IOVCC | |
| 12 | VCC | |
| 13 | SDI | |
| 14 | SDO | |
| 15 | D17 | |
| 16 | D16 | |
| 17 | D15 | |
| 18 | D14 | |
| 19 | D13 | |
| 20 | D12 | |
| 21 | D11 | |
| 22 | D10 | |
| 23 | D9 | |
| 24 | D8 | |
| 25 | D7 | |
| 26 | D6 | |
| 27 | D5 | |
| 28 | D4 | |
| 29 | D3 | |
| 30 | D2 | |
| 31 | D1 | |
| 32 | D0 | |
| 33 | RESET | |
| 34 | RD | |
| 35 | WR/SCL | |
| 36 | RS | |
| 37 | CS | |
| 38 | LEDK6 | |
| 39 | LEDK5 | |
| 40 | LEDK4 | |
| 41 | LEDK3 | |
| 42 | LEDK2 | |
| 43 | LEDK1 | |
| 44 | LEDA | |
| 45 | LCM_ID | |

NOTES:

- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK.
- OPERATING VOLTAGE: IOVCC=1.8V, VCC=2.8V.
- VIEWING DIRECTION: FULL VIEWING ANGLE.
- IC DRIVER: HX8357D.
- OPERATING TEMP: -20°C ~ 70°C.
- STORAGE TEMP: -30°C ~ 80°C.
- LED BACKLIGHT: 6-CHIP WHITE LED, If=120mA, Vf=2.9~3.3V.
- SURFACE LUMINANCE: 350cd/m²(TYP.)
- TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
- GENERAL TOLERANCE: ±0.2.
- RoHS COMPLIANT.

| VER. | REVISD DESCRIPTION | DATE |
|------|--------------------|------------|
| 01 | FIRST ISSUE | 2016.07.21 |

| | | | |
|---|------------------|---|--------------|
|  MULTI-INNO TECHNOLOGY CO.,LTD. | | | |
| DRAWN BY: | CAROL 2016.07.21 | SCALE : 1/1 | MODULE P/N: |
| CHECKED BY: | | UNIT: mm | MI0350AKT-4 |
| APPROVED BY: | |  | DESCRIPTION: |
| VERSION NO: | 01 | | TFT MODULE |