


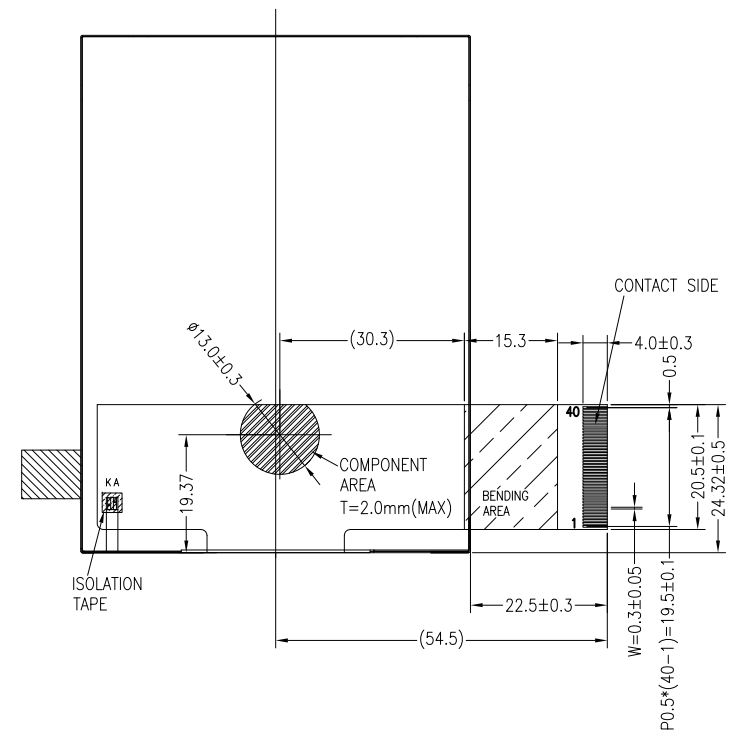
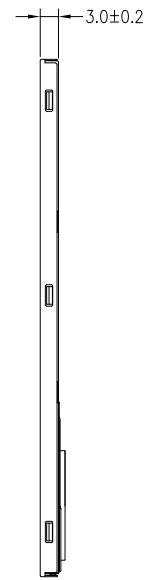


PIN DESCRIPTION	
PIN	SYMBOL
1	DE
2	GND
3	GND
4	GND
5	NC
6	R0
7	R1
8	R2
9	R3
10	R4
11	R5
12	G0
13	G1
14	G2
15	G3
16	G4
17	G5
18	B0
19	B1
20	B2
21	B3
22	B4
23	B5
24	SCL
25	SDA
26	/CS
27	D0TCLK
28	/RESET
29	HSYNC
30	VSYNC
31	VCC
32	VCC
33	GND
34	LED_A
35	LED_K
36	GND
37	NC
38	NC
39	NC
40	NC

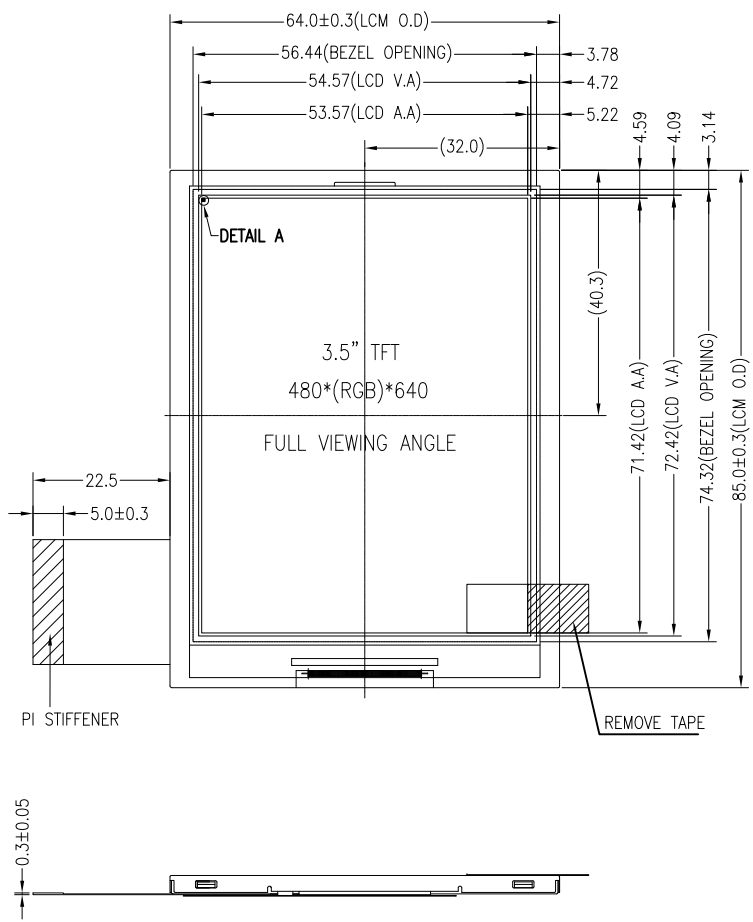

DETAIL A
(SCALE 40:1)



BACKLIGHT CIRCUIT DIAGRAM

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
 2. OPERATING VOLTAGE: VCC=2.8V (TYP.)
 3. VIEWING DIRECTION: FULL VIEWING ANGLE
 4. DRIVER IC: HX8363-A
 5. OPERATING TEMP.: -20°C ~ 70°C
 6. STORAGE TEMP.: -30°C ~ 80°C
 7. LED BACKLIGHT: 6-CHIP WHITE LED, IF=20mA, VF=19.2V±1.2V
 8. SURFACE LUMINANCE: 150CD/M² (TYP.)
 9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
 10. THE SINGLE LAYER AREA OF FPC IS BENDABLE AND THE BENDING RADIUS MUST BE NOT LESS THAN 1.5MM
 11. GENERAL TOLERANCE: ±0.2MM
 12. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY: RITA	2018.09.10		MODULE P/N: MI0350AWT-1
CHECKED BY:		SCALE : 1/1	
APPROVED BY:		UNIT: mm	DESCRIPTION: TFT MODULE
VERSION NO: 01		SHEET NO.: 1/1	

VER.	REVISED DESCRIPTION	REVISOR	DATE
01	FIRST ISSUE	RITA	2018.09.10