


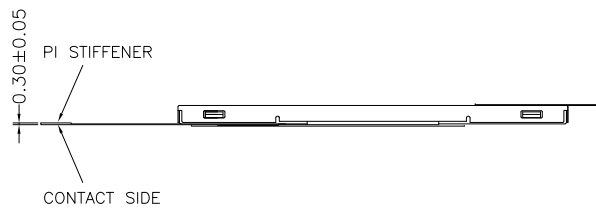
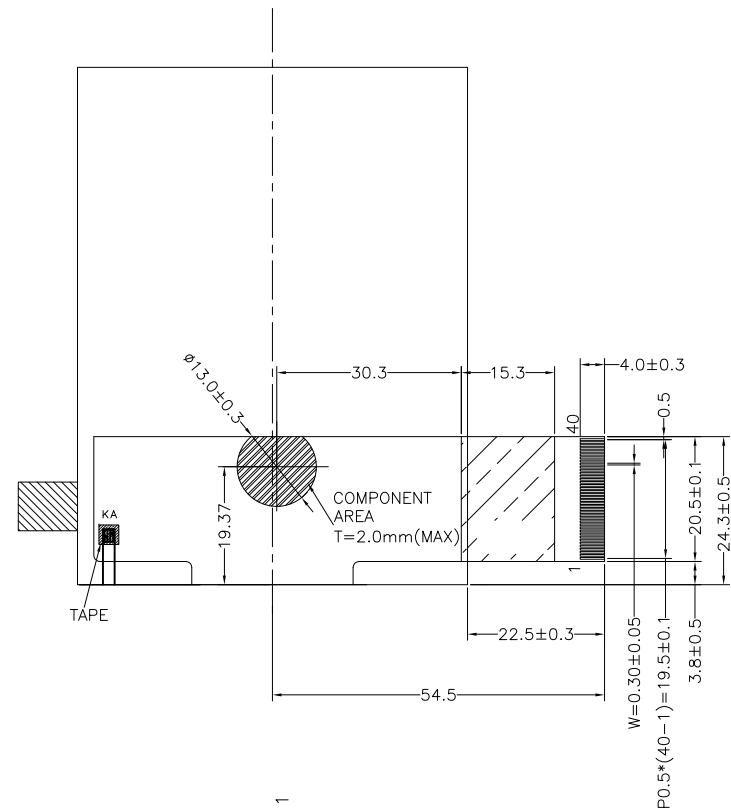
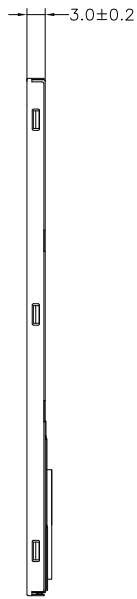


PIN ASSIGNMENT	
NO.	SYMBOL
1	DE
2	GND
3	GND
4	GND
5	NC
6	R0
7	R1
8	R2
9	R3
10	R4
11	R5
12	G0
13	G1
14	G2
15	G3
16	G4
17	G5
18	B0
19	B1
20	B2
21	B3
22	B4
23	B5
24	SCL
25	SDA
26	/CS
27	DOTCLK
28	/RESET
29	HSYNC
30	VSYNC
31	VCC
32	VCC
33	GND
34	LED_A
35	LED_K
36	GND
37	NC
38	NC
39	NC
40	NC

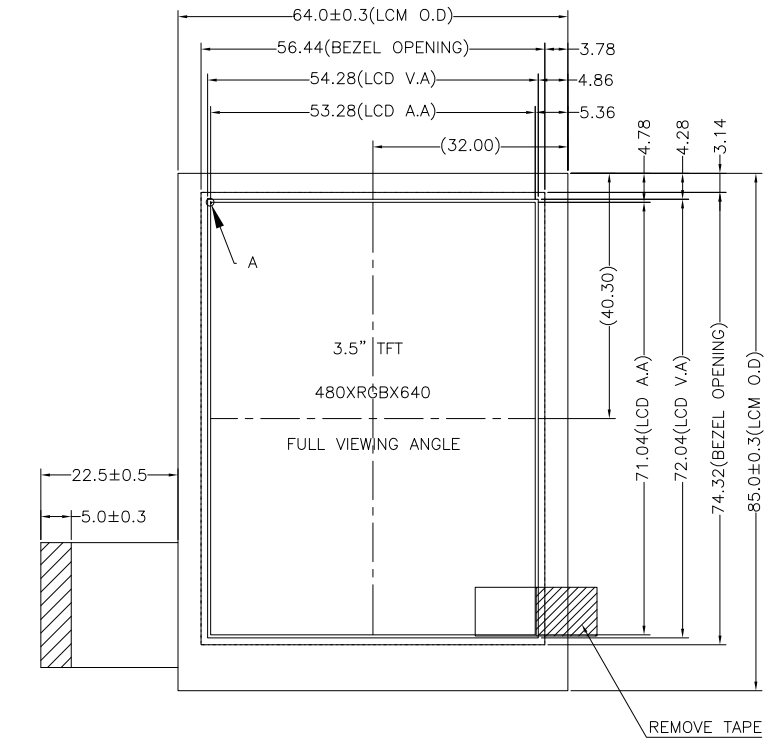

DETAIL A  
(SCALE 50:1)

- NOTES:
1. DISPLAY TYPE: TFT, BLANVIEW (SUNLIGHT READABLE), NORMALLY BLACK
  2. VIEWING DIRECTION: FULL VIEWING ANGLE
  3. OPERATING VOLTAGE: VCC=2.8V
  4. DRIVER IC: ILI9806E-2
  5. OPERATING TEMP.: -20°C ~ 70°C
  6. STORAGE TEMP.: -30°C ~ 80°C
  7. BACKLIGHT: 6-CHIPS WHITE LED, IF=20mA, Vf=19.2V±1.2V
  8. SURFACE LUMINANCE: 500CD/M<sup>2</sup>(TYP.)
  9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
  10. GENERAL TOLERANCE: ±0.2MM
  11. ROHS COMPLIANT

BACKLIGHT CIRCUIT DIAGRAM

VER.	REVISED DESCRIPTION	REVISER	DATE
02	CORRECT THE DISPLAY TYPE IN NOTES.	RITA	2019.05.31
01	FIRST ISSUE	RITA	2018.09.12

MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	RITA	2018.09.12	
CHECKED BY:			SCALE : 1/1
APPROVED BY:			UNIT: mm
VERSION NO:	02		SHEET NO.: 1/1
			MODULE P/N: MI0350AYT-1
			DESCRIPTION: TFT MODULE