
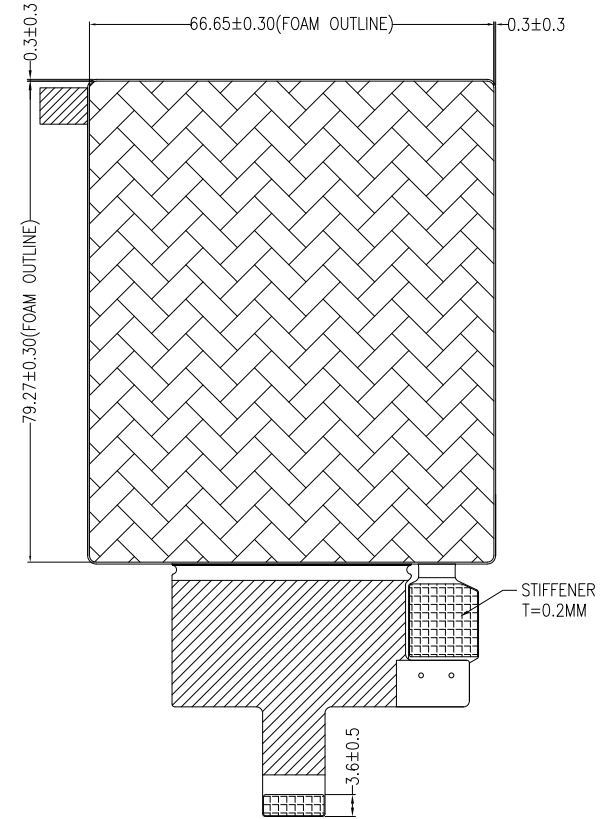

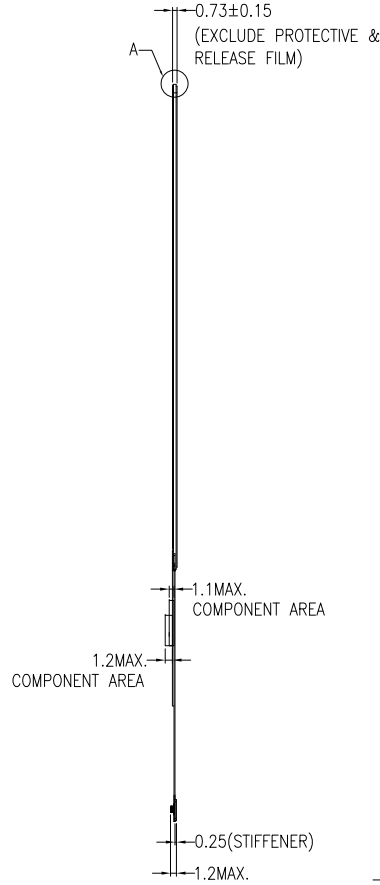


NOTES:

1. DISPLAY TYPE: LTPS, AMOLED
2. VIEWING DIRECTION: FULL VIEWING ANGLE
3. DRIVER IC: CH13726A
4. CTP DRIVER IC: FT3519
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -40°C ~ 80°C
7. INTERFACE: 4-LANE MIPI
8. SURFACE LUMINANCE: 500CD/M² (TYP.)
9. UNMARKED TOLERANCE: ±0.3MM
10. ROHS COMPLIANT

PIN DESCRIPTION	
PIN	SYMBOL
1	GND
2	D0P
3	D0N
4	GND
5	D1P
6	D1N
7	GND
8	CLKP
9	CLKN
10	GND
11	D2P
12	D2N
13	GND
14	D3P
15	D3N
16	GND
17	TP_RESET
18	TP_SCL
19	TP_SDA
20	VCI
21	TP_AVDD
22	TP_VDDIO
23	TP_INT
24	AVDD_EN
25	SWIRE
26	TE
27	RSTB
28	VDDIO
29	ELVSS
30	ELVSS
31	ELVSS
32	ELVDD
33	ELVDD
34	ELVDD
35	MTP_PWR(NC)
36	AVDD
37	ID(NC)
38	ERR_FG

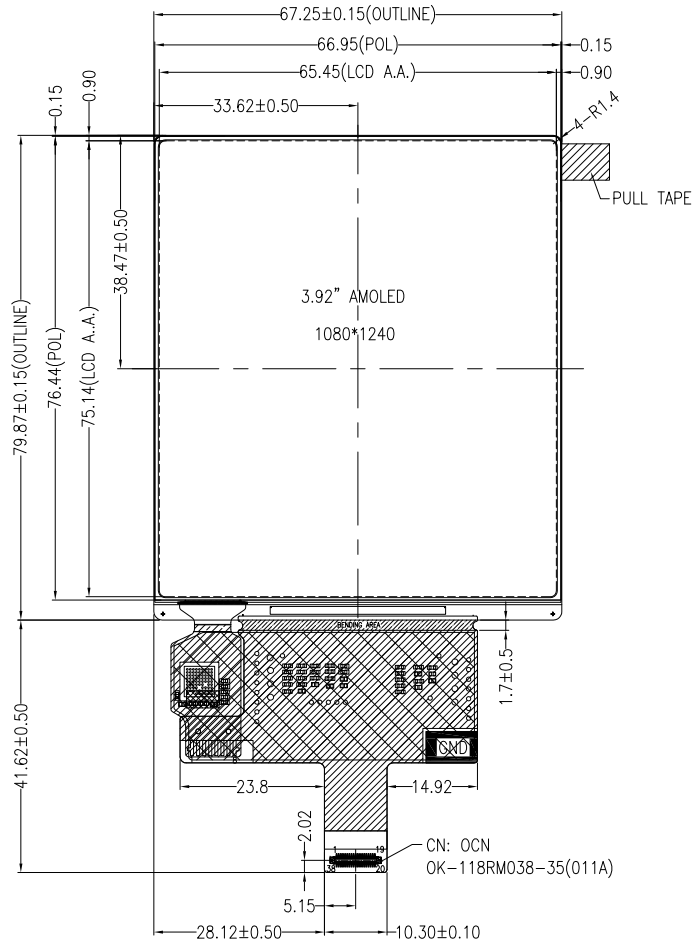

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2024.12.07		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0392AO-FCP
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	AMOLED + CTP MODULE

01	FIRST ISSUE	CAROL	2024.12.07
VER.	REVISED DESCRIPTION	REVISOR	DATE