

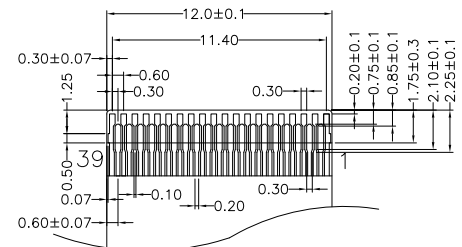


DETAIL A
(SCALE 40:1)



DETAIL B
(SCALE 3:1)



LED CIRCUIT DIAGRAM

PIN ASSIGNMENT	
PIN NO	SYMBOL
1	YU
2	XL
3	YD
4	XR
5	LED_K
6	GND
7	LED_A
8	VDD
9	VDD
10	VDDIO
11	VDDIO
12	CS
13	SCL
14	SDI
15	GND
16	B0
17	B1
18	B2
19	B3
20	B4
21	GND
22	G0
23	G1
24	G2
25	G3
26	G4
27	G5
28	R0
29	R1
30	R2
31	R3
32	R4
33	GND
34	DEN
35	DOTCLK
36	HSYNC
37	VSYNC
38	RESET
39	GND

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK.
 2. VIEWING DIRECTION: FULL VIEWING ANGLE.
 3. OPERATING VOLTAGE: VDD=2.8V; VDDIO=1.8/2.8V.
 4. DRIVER IC: ILI9806E.
 5. OPERATING TEMP.: -20°C ~ 70°C.
 6. STORAGE TEMP.: -30°C ~ 80°C.
 7. BACKLIGHT: 8-CHIP WHITE LED, IF=40mA, VF=12.8V±0.8V.
 8. SURFACE LUMINANCE: 340/CD²(TYP.).
 9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
 10. GENERAL TOLERANCE: ±0.2mm.
 11. ROHS COMPLIANT.

MIL MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	RITA	2018.10.12	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	MIO400JT-1RP
APPROVED BY:			mm	DESCRIPTION:
VERSION NO:	02			TFT & RTP MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:
02	CORRECT THE DIMENSIONS OF TOTAL AND TOTAL TOLERANCE	RITA	2018.10.16	
01	FIRST ISSUE	RITA	2018.10.12	