

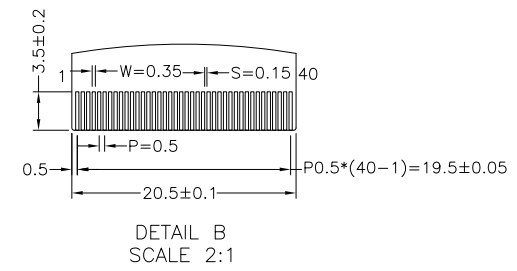



TFT PIN DESCRIPTION	
PIN	SYMBOL
1	LEDK
2	LEDA
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

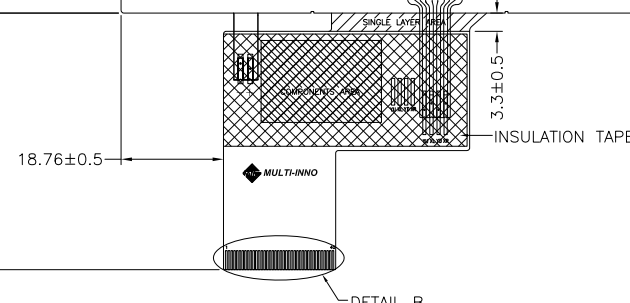

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
  2. OPERATING VOLTAGE: VDD=3.3V
  3. VIEWING DIRECTION: 12 O'CLOCK
  4. DRIVER IC: ST7282-G4-1L
  5. OPERATING TEMP.: -20°C ~ 70°C
  6. STORAGE TEMP.: -30°C ~ 80°C
  7. LED BACKLIGHT: 10-CHIP WHITE LED, If=40mA, Vf=14V~17V
  8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
  9. SURFACE LUMINANCE: 440CD/M<sup>2</sup>(TYP)
  10. THE SINGLE LAYER AREA OF FPC IS BENDABLE AND THE BENDING RADIUS MUST BE NOT LESS THAN 1.5MM
  11. GENERAL TOLERANCE: ±0.2MM
  12. ROHS COMPLIANT

**MULTI-INNO TECHNOLOGY CO., LTD.**

DRAWN BY:	CAROL	2021.04.24		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0430AET-5RP
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT + RTP MODULE

VER.	FIRST ISSUE	REVISOR	DATE
01	FIRST ISSUE	CAROL	2021.04.24
	REVISED DESCRIPTION		