


CN2 CONNECTOR MATED FPC/FFC STYLE (SCALE 2:1)

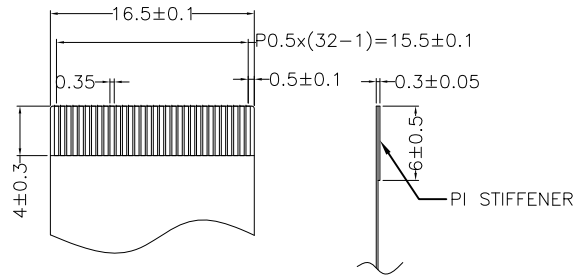

16-BIT (CN2) DESCRIPTION	
PIN	SYMBOL
1	GND
2	VCC
3	BL_E
4	RS
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	DB8
16	DB9
17	DB10
18	DB11
19	DB12
20	DB13
21	DB14
22	DB15
23	VCC
24	GND
25	/CS
26	/RST
27	TE
28	NC
29	NC
30	NC
31	NC
32	DISP

- NOTES:
1. DISPLAY TYPE: TFT / TRANSMISSIVE / NORMALLY BLACK.
 2. VIEWING DIRECTION: FULL VIEWING ANGLE.
 3. OPERATING VOLTAGE: VCC=3.3V.
 4. DRIVER IC: SSD1963.
 5. OPERATING TEMP.: -20°C ~ 70°C.
 6. STORAGE TEMP.: -30°C ~ 80°C.
 7. BACKLIGHT: 10-CHIP WHITE LED, IF=40mA, Vf=14V~17V.
 8. SURFACE LUMINANCE: 550CD/M² (TYP.).
 9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
 10. GENERAL TOLERANCE: ±0.2mm.
 11. ROHS COMPLIANT.

Mit MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL	2019.09.19		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0430AHT-1-B
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT + PCB MODULE

01	FIRST ISSUE	CAROL	2019.09.19
VER.	REVISED DESCRIPTION	REVISER	DATE