

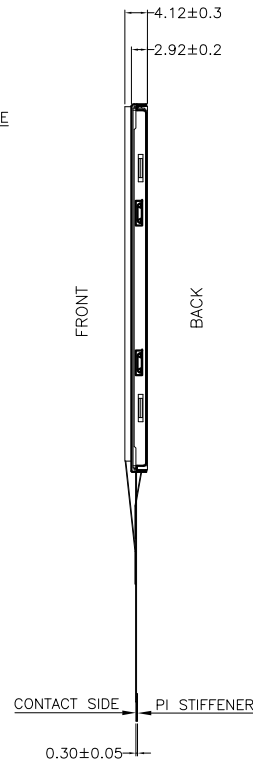



DETAIL A  
(SCALE 40:1)

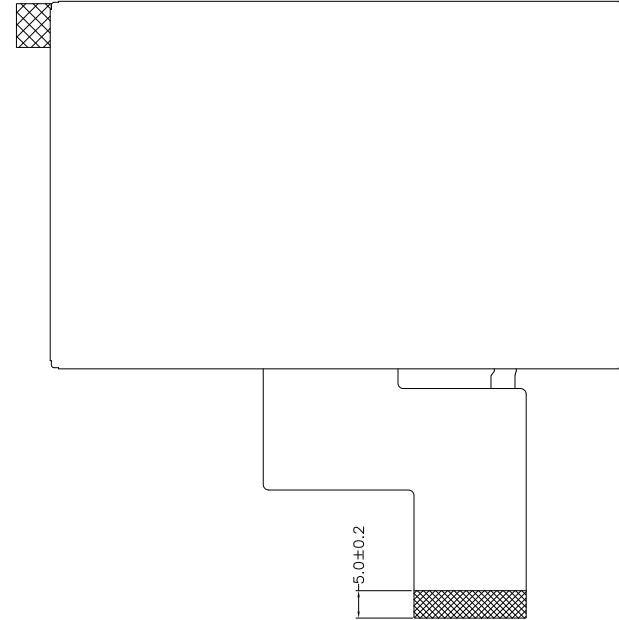

DETAIL B  
(SCALE 4:1)

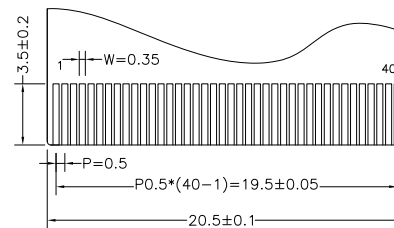

BACKLIGHT CIRCUIT DIAGRAM

PIN NO	SYMBOL	PIN ASSIGNMENT
1	LEDK	
2	LEDA	
3	GND	
4	VDD	
5	R0	
6	R1	
7	R2	
8	R3	
9	R4	
10	R5	
11	R6	
12	R7	
13	G0	
14	G1	
15	G2	
16	G3	
17	G4	
18	G5	
19	G6	
20	G7	
21	B0	
22	B1	
23	B2	
24	B3	
25	B4	
26	B5	
27	B6	
28	B7	
29	GND	
30	DCLK	
31	DISP	
32	HSYNC	
33	VSYNC	
34	DE	
35	NC	
36	GND	
37	XR	
38	YD	
39	XL	
40	YU	

NOTES:

1. DISPLAY TYPE: TFT / TRANSMISSIVE / NORMALLY BLACK.
2. VIEWING DIRECTION: FULL VIEWING ANGLE.
3. OPERATING VOLTAGE: VDD=3.3V.
4. DRIVER IC: SC7283.
5. OPERATING TEMP.: -20°C ~ 70°C.
6. STORAGE TEMP.: -30°C ~ 80°C.
7. BACKLIGHT: 10-CHIP WHITE LED, IF=40mA, Vf=14V~17V.
8. SURFACE LUMINANCE: 440CD/M<sup>2</sup> (TYP.)(WITH TP).
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
10. GENERAL TOLERANCE: ±0.2mm.
11. ROHS COMPLIANT.

VER.	FIRST ISSUE	REVISER	DATE
01		RITA	2019.05.24

MULTI-INNO TECHNOLOGY CO.,LTD.			
DRAWN BY:	RITA	20190524	SCALE : 1/1
CHECKED BY:			UNIT: mm
APPROVED BY:			DESCRIPTION: TFT + RTP MODULE
VERSION NO:	01		