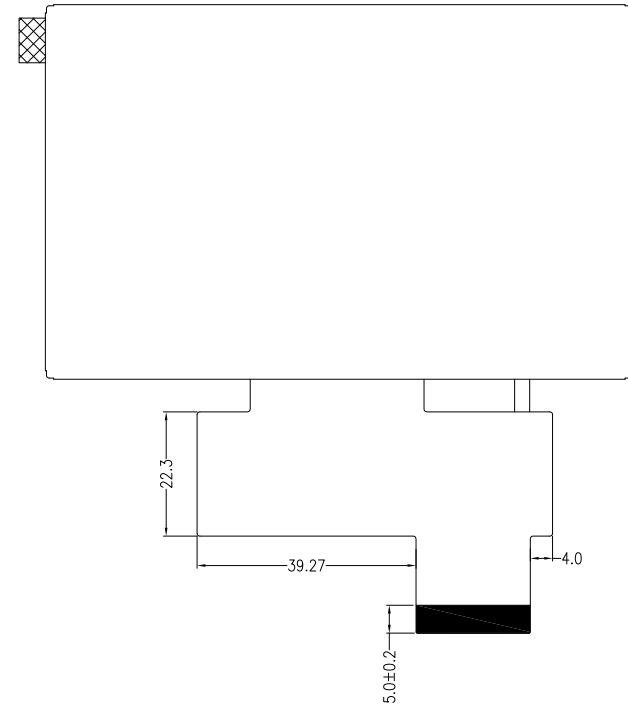
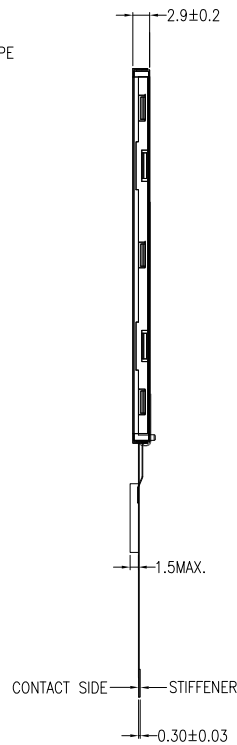
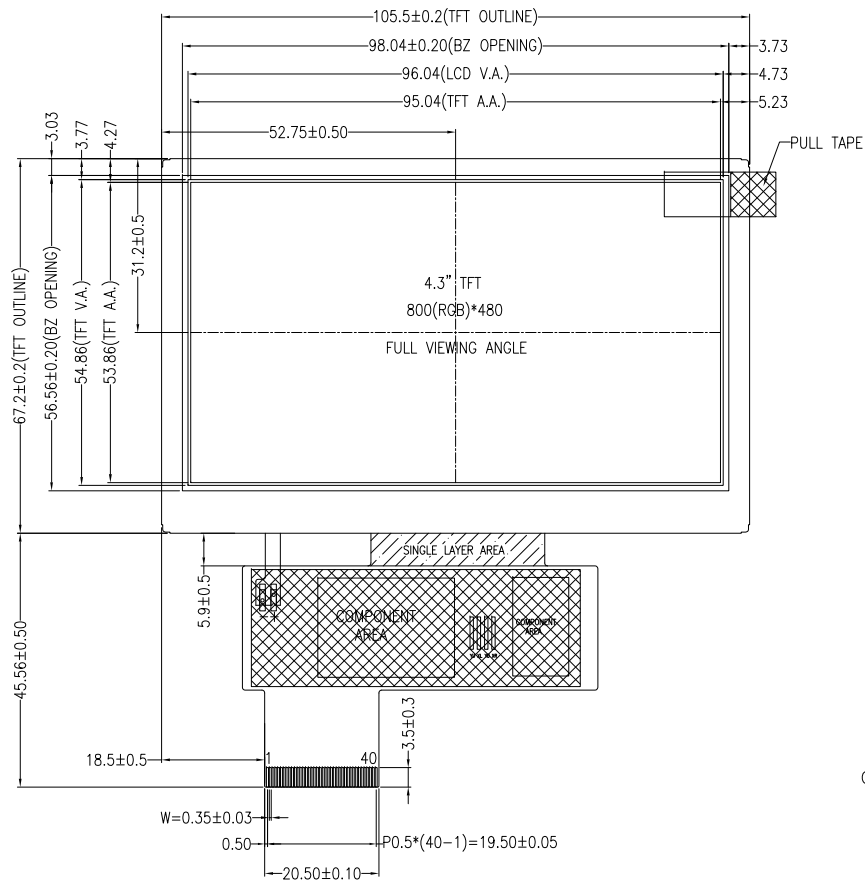


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: ST72611
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT TYPE: WHITE LED, IF=40mA, VF=14V~17V
8. SURFACE LUMINANCE: 500CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. UNMARKED TOLERANCE: ±0.3MM
12. ROHS COMPLIANT

PIN DESCRIPTION	
PIN	SYMBOL
1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLK-
18	RXCLK+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	NC
30	GND
31	LEDK
32	LEDK
33	L/R
34	U/D
35	NC(YU)
36	NC(XL)
37	NC(YD)
38	NC(XR)
39	LEDA
40	LEDA

MULTI-INNO TECHNOLOGY CO., LTD.				MODULE P/N:	
DRAWN BY:	CAROL	2024.09.24		SCALE : 1/1	
CHECKED BY:				UNIT: mm	
APPROVED BY:				DESCRIPTION:	
VERSION NO:	01			SHEET NO.: 1/1	
				TFT MODULE	

01	FIRST ISSUE	CAROL	2024.09.24
VER.	REVISED DESCRIPTION	REVISER	DATE