
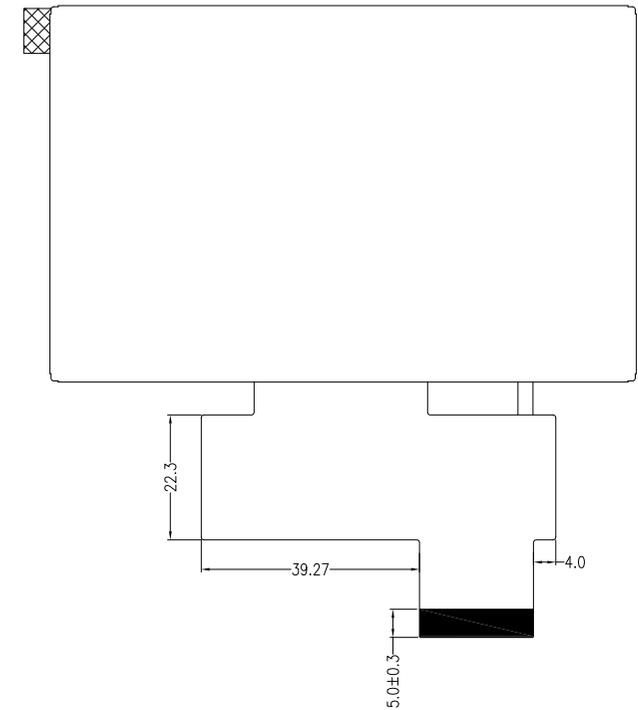
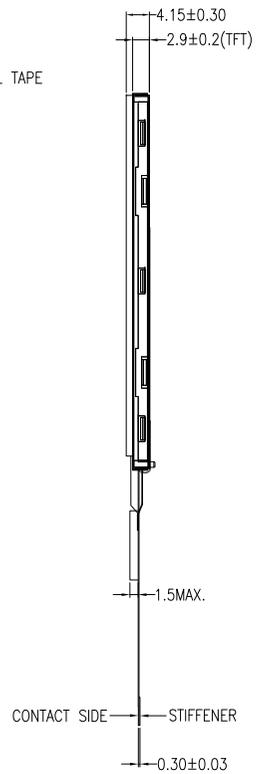




FOR ANY TOUCH PANEL OR OTHER ACCESSORIES ASSEMBLED WITH FRAME GLUE, A PERMANENT AND RELIABLE MECHANICAL STRUCTURE NEEDS TO BE DESIGNED ON CUSTOMER'S WHOLE MACHINE TO HOLD THEM IN PLACE TO AVOID LOOSE.

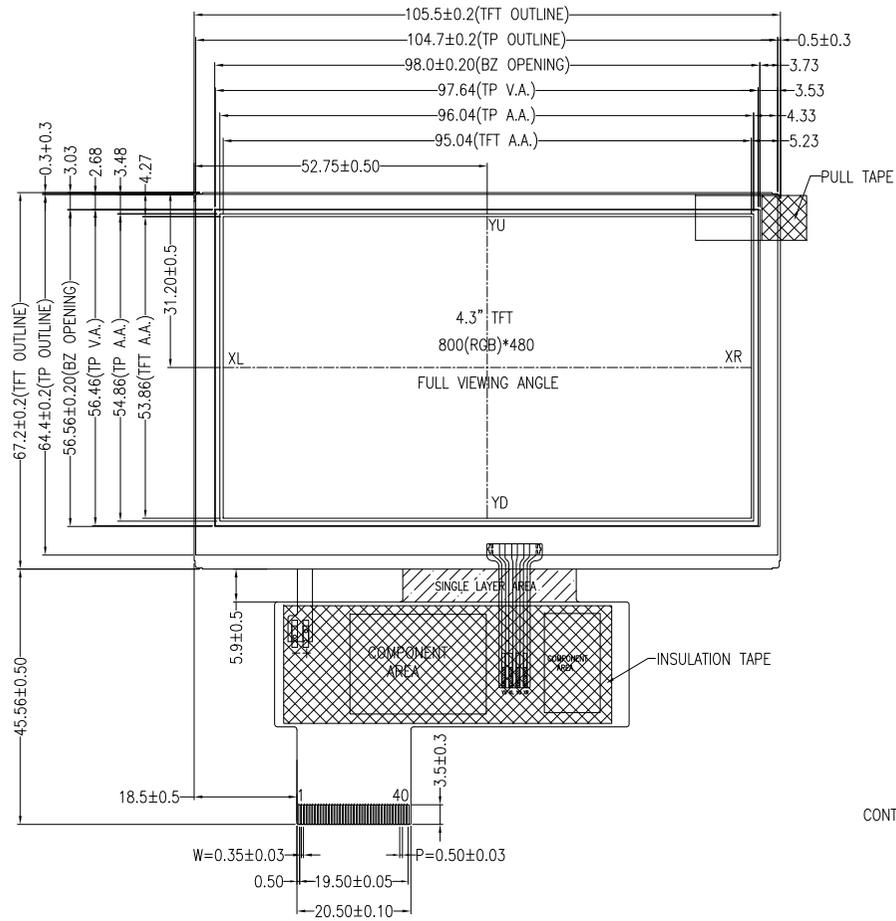

PIN DESCRIPTION	
PIN	SYMBOL
1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLK-
18	RXCLK+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	NC
30	GND
31	LEDK
32	LEDK
33	L/R
34	U/D
35	YU
36	XL
37	YD
38	XR
39	LEDA
40	LEDA

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: ST72611
5. OPERATING TEMP: -20°C ~ 70°C
6. STORAGE TEMP: -30°C ~ 80°C
7. BACKLIGHT TYPE: WHITE LED, IF=40mA, VF=14V~17V
8. SURFACE LUMINANCE: 400CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. UNMARKED TOLERANCE: ±0.3MM
12. ROHS COMPLIANT

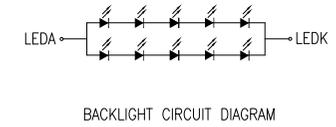

Mit MULTI-INNO TECHNOLOGY CO., LTD.

01	FIRST ISSUE	CAROL	2025.09.24	APPROVED BY:	SCALE : 1/1	MODULE P/N:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	UNIT: mm	DESCRIPTION:
				01	SHEET NO: 1/1	TFT + RTP MODULE