



DETAIL A  
SCALE 100:1

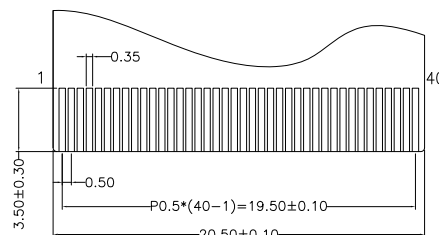

DETAIL B  
SCALE 4:1




BACKLIGHT CIRCUIT DIAGRAM

TFT PIN DESCRIPTION	
PIN	SYMBOL
1	LEDK
2	LEDA
3	GND
4	VDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC(YU)
38	NC(XL)
39	NC(YD)
40	NC(XR)

NOTES:

1. DISPLAY TYPE: ADS TFT, TRANSMISSIVE, NORMALLY BLACK.
2. OPERATING VOLTAGE: VDD=3.3V.
3. VIEWING DIRECTION: FULL VIEWING ANGLE.
4. DRIVER IC: ST7262E3.
5. OPERATING TEMP.: -30°C ~ 85°C.
6. STORAGE TEMP.: -30°C ~ 85°C.
7. LED BACKLIGHT: 10-CHIP WHITE LED, If=40mA, Vf=14V~17V.
8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
9. SURFACE LUMINANCE: 500CD/M<sup>2</sup>(TYP).
10. GENERAL TOLERANCE: ±0.3MM.
11. ROHS COMPLIANT.

 MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL 2019.10.22		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI0430CFT-1
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO.: 1/1	TFT MODULE

01	FIRST ISSUE	CAROL	2019.10.22
VER.	REVISED DESCRIPTION	REVISOR	DATE