


△ CN2 CONNECTOR MATED FPC/FFC STYLE (SCALE 2:1)

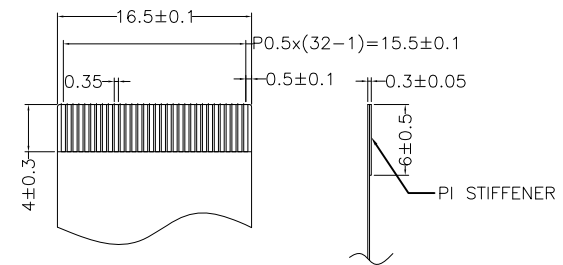

16-BIT MODE(CN2)	
Pin No.	Symbol
1	GND
2	VCC
3	BL_E
4	RS
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	DB8
16	DB9
17	DB10
18	DB11
19	DB12
20	DB13
21	DB14
22	DB15
23	VCC
24	GND
25	/CS
26	/RST
27	TE
28	X1
29	Y1
30	X2
31	Y2
32	DISP

NOTES:

1. DISPLAY TYPE: TN TFT
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSMISSIVE/POSITIVE
4. VCC=3.3V(TYP)
5. OPERATING TEMP: -20°C -- +70°C
6. STORAGE TEMP: -30°C -- +80°C
7. LCD CONTROLLER: SSD1963
8. INTERFACE: 16-BIT 8080 MPU
9. BACKLIGHT: WHITE LED
10. UNMARKED TOLERANCE: ±0.30mm
11. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

VER.	REVISED DESCRIPTION	DATE	VERSION NO:	03
03	ADD CN2 CONNECTOR MATED FPC/FFC STYLE. MODIFY THE DEFINITION OF PIN.	2019.09.20	DRAWN BY:	RITA 2017.01.11
02	CORRECT THE ASSEMBLY DIMENSIONS FOR LCD A.A. TO TFT 0.0, CORRECT THE P/N OF CONNECTOR	2017.01.11	CHECKED BY:	
01	FIRST ISSUE	2013.01.14	APPROVED BY:	
			SCALE :	1/1
			UNIT:	mm
			MODULE P/N:	MI0430L1T
			DESCRIPTION:	TFT MODULE



MULTI-INNO TECHNOLOGY CO.,LTD.