


△ CN2 CONNECTOR MATED FPC/FFC STYLE (SCALE 2:1)

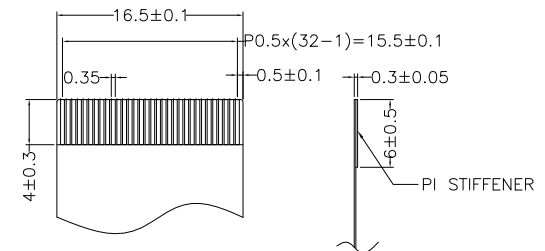


8-/16-BIT MODE (CN2)	
PIN NO.	SYMBOL
1	GND
2	VCC
3	BL_E
4	RS
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	DB8
16	DB9
17	DB10
18	DB11
19	DB12
20	DB13
21	DB14
22	DB15
23	VCC
24	GND
25	/CS
26	/RST
27	TE
28	NC
29	NC
30	NC
31	NC
32	DISP

NOTES:

1. DISPLAY TYPE: TN TFT
2. VIEWING DIRECTION: 6:00 O'CLOCK
3. POLARIZER MODE: TRANSMISSIVE/POSITIVE
4. VCC=3.3V(TYP)
5. OPERATING TEMP: -20°C -- +70°C
6. STORAGE TEMP: -30°C -- +80°C
7. LCD CONTROLLER: SSD1963
8. INTERFACE: 8-/16-BIT 8080 MPU
9. BACKLIGHT: WHITE LED
10. UNMARKED TOLERANCE: ±0.30mm
11. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

05	OPTIMIZATION THE DRAWING.	CAROL	2020.08.05
04	ADD CN2 CONNECTOR MATED FPC/FFC STYLE. MODIFY THE DEFINITION OF PIN.	RITA	2019.09.20
03	CORRECT P/N OF CONNECTOR.	RITA	2016.11.15
02	CORRECT MODULE DIMENSIONS FOR LCD AA TO TFT O.D	RITA	2016.09.12
01	FIRST ISSUE	JACK	2012.02.18
VER.	REVISED DESCRIPTION	REVISER	DATE

 <b>MULTI-INNO TECHNOLOGY CO.,LTD.</b>			
DRAWN BY:	JACK	2012.02.18	MODULE P/N:
CHECKED BY:			MI0430L1T-1
APPROVED BY:			DESCRIPTION:
VERSION NO:	05		TFT MODULE
		SCALE : 1/1	UNIT: mm
		SHEET NO.: 1/1	