




16-BIT MODE(CN2)	
Pin No.	Symbol
1	GND
2	VCC
3	BL_E
4	RS
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	DB8
16	DB9
17	DB10
18	DB11
19	DB12
20	DB13
21	DB14
22	DB15
23	VCC
24	GND
25	/CS
26	/RST
27	TE
28	NC
29	NC
30	NC
31	NC
32	DISP



④ CN2 CONNECTOR MATED FPC/FFC STYLE (SCALE 2:1)

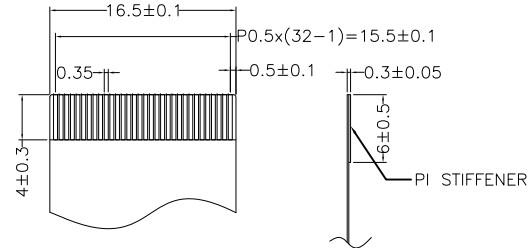

NOTES:

1. DISPLAY TYPE: TN TFT/TRANSMISSIVE/NORMALLY WHITE
2. VIEWING DIRECTION: 12:00 O'CLOCK
3. OPERATING VOLTAGE: VCC=3.3V(TYP)
4. OPERATING TEMP.: -20°C -- +70°C
5. STORAGE TEMP.: -30°C -- +80°C
6. LCD CONTROLLER: SSD1963
7. INTERFACE: 8/16-BIT 8080 MPU
8. BACKLIGHT: WHITE LED
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE ③
10. UNMARKED TOLERANCE: ±0.30mm
11. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



MULTI-INNO TECHNOLOGY CO.,LTD.

VER.	REVISED DESCRIPTION	REVISER	DATE
04	ADD CN2 CONNECTOR MATED FPC/FFC STYLE. MODIFY THE DEFINITION OF PIN.	CAROL	2019.09.20
03	Modify the dimensions from LCD AA and bezel opening to LCM O.D	RITA	2017.04.11
02	CORRECT THE P/N OF CONNECTOR	RITA	2017.01.01
01	First issue	JACK	2014.03.18

DRAWN BY:	JACK	2014.03.18	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	Mi0430L1T-5
APPROVED BY:			mm	DESCRIPTION:
VERSION NO:	04			TFT MODULE