
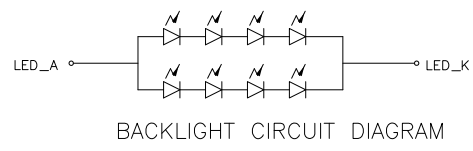
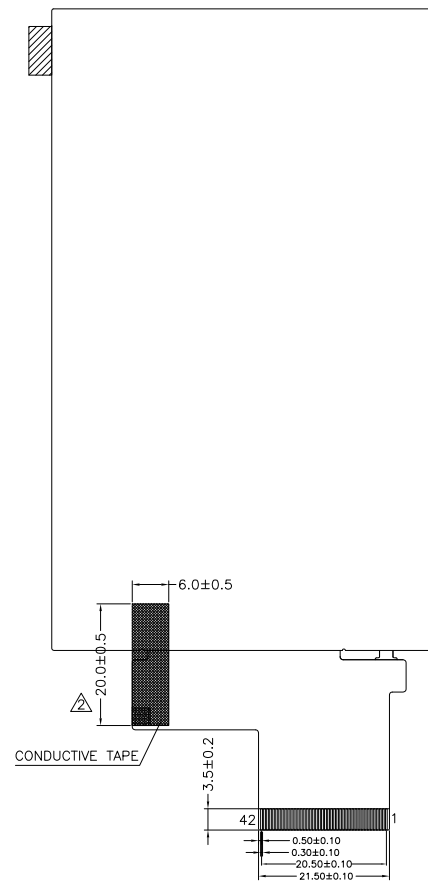
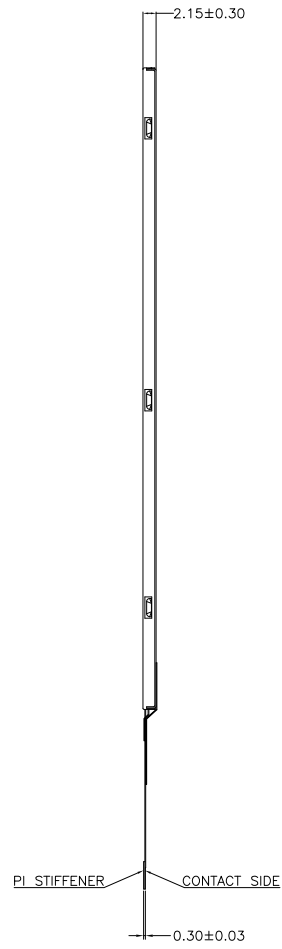



PIN ASSIGNMENT	
NO.	SYMBOL
1	LED_A
2	LED_K
3	GND
4	GND
5	VCC
6	VDDIO
7	VSYNC
8	HSYNC
9	DE
10	PCLK
11	RESET
12	CS
13	SCL
14	SDI
15	SDO
16	DB0(B0)
17	DB1
18	DB2
19	DB3
20	DB4
21	DB5
22	DB6
23	DB7(B7)
24	GND
25	DB8(G0)
26	DB9
27	DB10
28	DB11
29	DB12
30	DB13
31	DB14
32	DB15(G7)
33	GND
34	DB16(R0)
35	DB17
36	DB18
37	DB19
38	DB20
39	DB21
40	DB22
41	DB23(R7)
42	GND

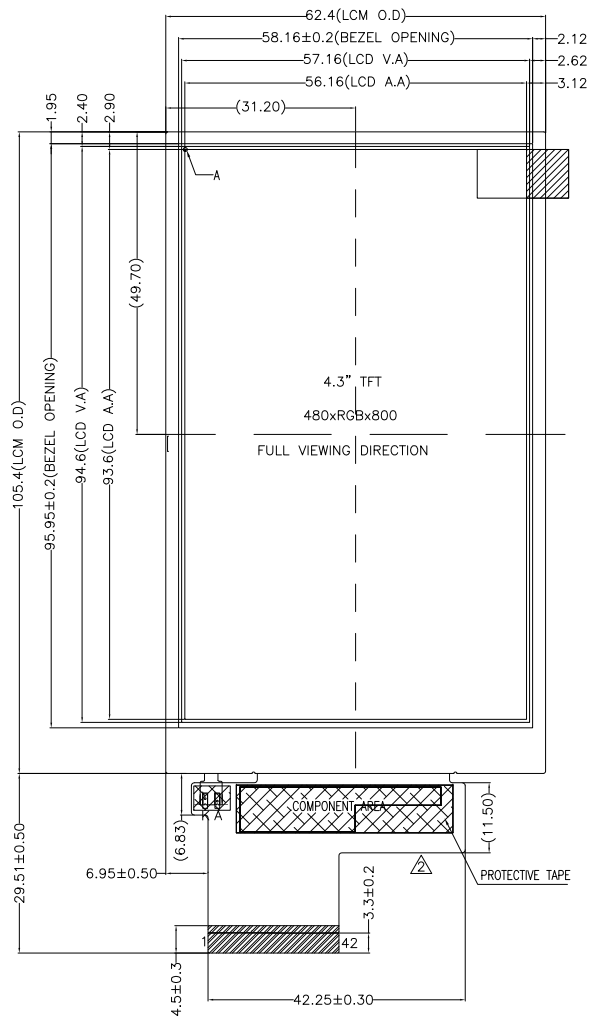

- NOTES:
1. DISPLAY TYPE: IPS TYPE TFT, NORMALLY BLACK.
  2. OPERATING VOLTAGE: VCC=3.3V.
  3. VIEWING DIRECTION: FULL VIEWING ANGLE.
  4. DRIVER IC: ILI9806E.
  5. OPERATING TEMP.: -20°~70°.
  6. STORAGE TEMP.: -30°~80°.
  7. LED BACKLIGHT: 8-CHIP WHITE LED, IF=40mA, VF=12.8V.
  8. SURFACE LUMINANCE: 350CD/M<sup>2</sup>(TYP.).
  9. TREATMENT OF TOP SURFACE: GLARE.
  10. GENERAL TOLERANCE: ±0.2mm.
  11. RoHS COMPLIANT.

**MIT** MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	RITA	2017.05.23	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI0430Z1T-2
APPROVED BY:			DESCRIPTION:	TFT MODULE
VERSION NO:	02			

VER.	REVISED DESCRIPTION	REVISER	DATE
02	ADD CONDUCTIVE TAPE ADD TVS DIODE IN FPC COMPONENT AREA	RITA	2020.05.08
01	FIRST ISSUE	RITA	2017.05.23