
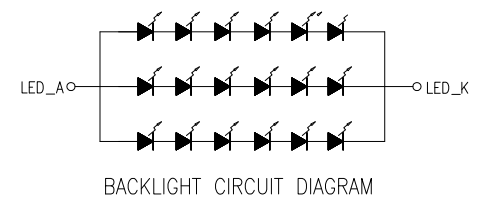
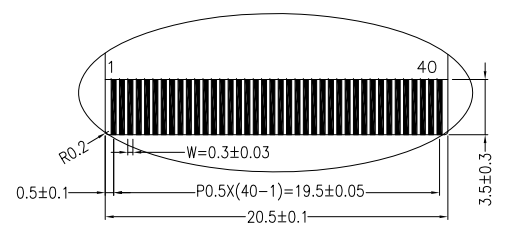

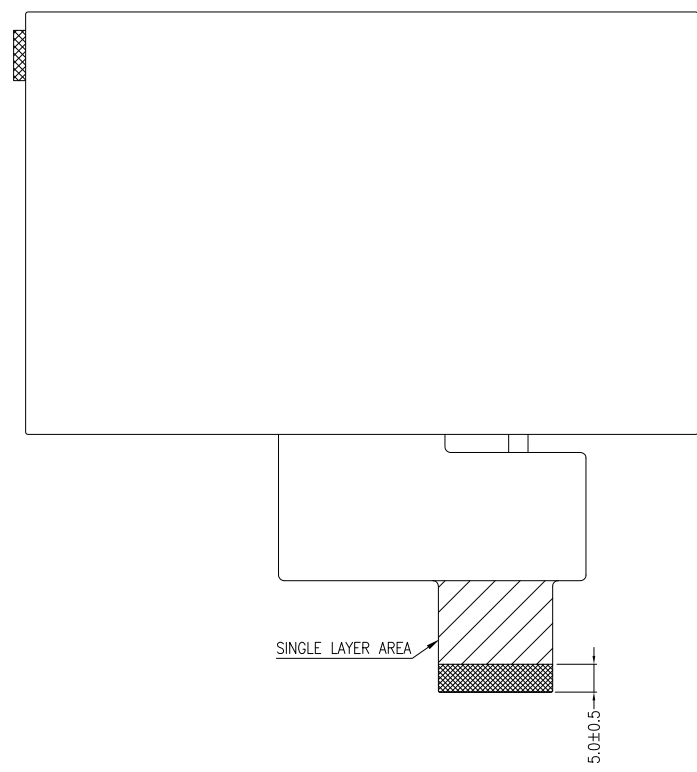
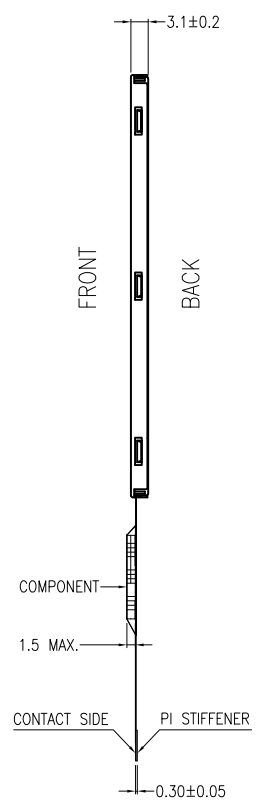


PIN ASSIGNMENT	
1	LED_K
2	LED_A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC (XR)
38	NC (YD)
39	NC (XL)
40	NC (YU)

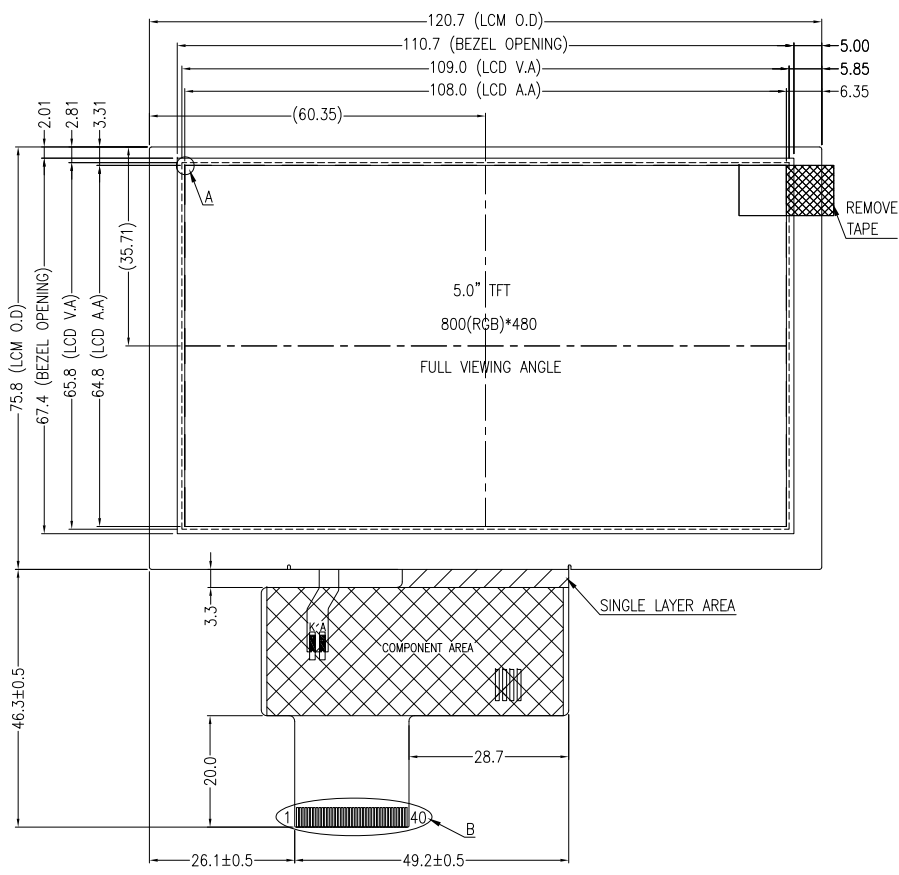

- NOTES:
1. DISPLAY TYPE: TFT / TRANSMISSIVE / NORMALLY BLACK.
 2. VIEWING DIRECTION: FULL VIEWING ANGLE.
 3. OPERATING VOLTAGE: VDD=3.3V.
 4. DRIVER IC: ST7262.
 5. OPERATING TEMP.: -30°C ~ 85°C.
 6. STORAGE TEMP.: -30°C ~ 85°C.
 7. BACKLIGHT: 18-CHIP WHITE LED, IF=60mA, Vf=19.2±1.2V.
 8. SURFACE LUMINANCE: 600CD/M² (TYP.).
 9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
 10. GENERAL TOLERANCE: ±0.3mm.
 11. ROHS COMPLIANT.

VER.	REVISED DESCRIPTION	REVISER	DATE
03	MODIFY PINS FROM NC TO GND.	CAROL	2019.10.24
02	CORRECT THE OPERATING AND STORAGE TEMPERATURES	RITA	2019.09.05
01	FIRST ISSUE	RITA	2019.08.23

MULTI-INNO TECHNOLOGY CO.,LTD.		DRAWN BY: RITA 20190823	SCALE : 1/1	MODULE P/N: MI0500AHT-3
		CHECKED BY:	UNIT: mm	DESCRIPTION: TFT MODULE
APPROVED BY:		VERSION NO: 03		