


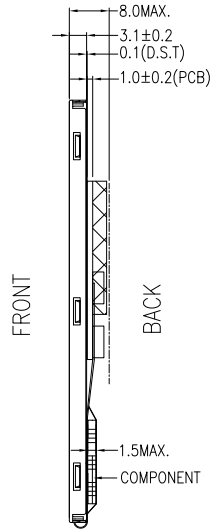


FOR ANY TOUCH PANEL OR OTHER ACCESSORIES ASSEMBLED WITH FRAME GLUE, A PERMANENT AND RELIABLE MECHANICAL STRUCTURE NEEDS TO BE DESIGNED ON CUSTOMER'S WHOLE MACHINE TO HOLD THEM IN PLACE TO AVOID LOOSE.

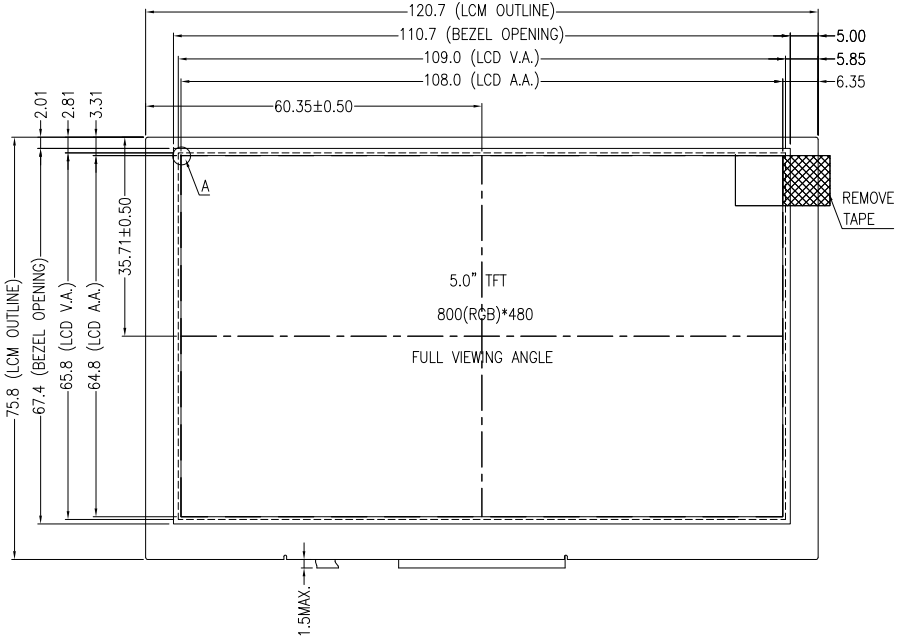

DETAIL A
(SCALE 40:1)

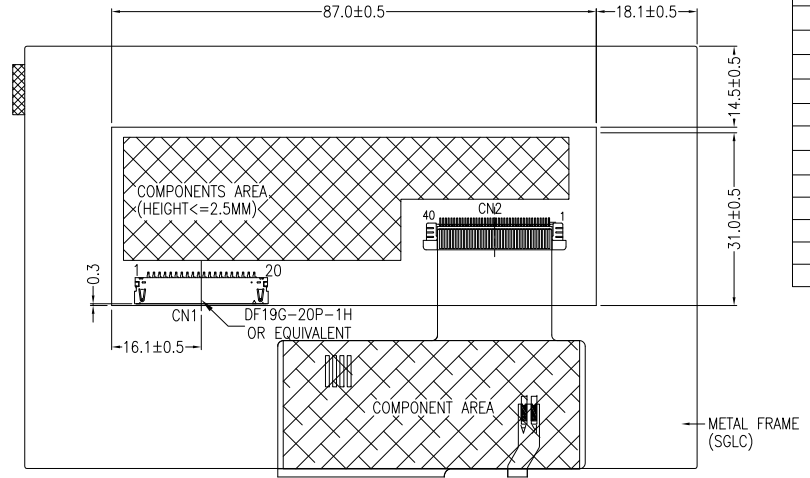

PIN ASSIGNMENT FOR CN1	
PIN	SYMBOL
1	VCC
2	VCC
3	VSS
4	IN0-
5	IN0+
6	VSS
7	IN1-
8	IN1+
9	VSS
10	IN2-
11	IN2+
12	VSS
13	CLK-
14	CLK+
15	VSS
16	IN3-
17	IN3+
18	VSS
19	BL_ADJ
20	VBL

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: ST7262
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -30°C ~ 85°C
7. LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VBL=5.0V
8. SURFACE LUMINANCE: 600CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.3MM
11. ROHS COMPLIANT

02	CHANGE OF OPERATING AND STORAGE TEMPERATURE	RITA	2024.07.27	CHECKED BY:		SCALE : 1/1	MODULE P/N:
01	FIRST ISSUE	RITA	2024.07.22	APPROVED BY:		UNIT: mm	MI0500AHT-3-B3
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	02	SHEET No.: 1/1	DESCRIPTION: TFT + PCB MODULE



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2024.07.22	UNIT: mm	MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0500AHT-3-B3
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	02		SHEET No.: 1/1	TFT + PCB MODULE